


# Q7B300 NEW

## Qseven Module Rev 2.1 Development Baseboard

### Features

- Qseven module evaluation purpose
- 1 Gigabit Ethernet port
- 2 SATA connectors
- 2 RS-232/422/485 & 1 RS-232
- 3 PCIe x1 slots
- 3 USB 3.0, 1 micro USB 2.0 port (optional)
- 1 PCI Express Mini Card slot (PCIe+USB+SMBus)
- 1 SD card slot
- 1 LVDS (or eDP)/DP connector

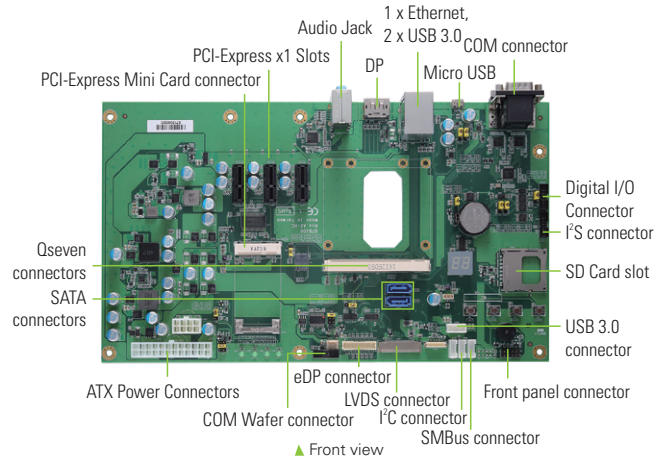

### Core System

CPU	On the module
System Memory	On the module
Chipset	SoC integrated
BIOS	On the module
SSD	N/A
Watchdog Timer	On the module
Expansion Interface	1 x PCI Express Mini Card slot (SD full-size) 3 x PCIe x1 1 x SD Card slot
Battery Lithium	Lithium 3V/220 mAH.
Power Input	AT/ATX power
Size	293.4 x 171.5 mm
Board Thickness	1.6 mm
Temperature	-20°C ~ +70°C (-40°F ~ +185°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

### I/O

MIO	2 x RS-232/422/485 1 x RS-232 (RX/TX/RTS/CTS) 1 x I <sup>2</sup> C 1 x SMBus
SATA	2 x SATA-600
Hardware Monitoring	Yes
Ethernet	1 port with 10/100/1000Mbps signals routed from CPU module
Audio	HD audio with Line-out/MIC-in
USB	3 x USB 3.0 1 x Micro USB 2.0 port (optional)
Digital I/O	4 channels IN & 4 channels OUT
Display	1 x LVDS 18/24-bit single channel LVDS 1 x eDP connector (switchable to LVDS with jumper setting) 1 x DisplayPort

### Packing List

Quick installation guide; user's manual/utility CD

### Ordering Information

Standard	
Q7B300	Qseven Rev 2.1 development board
(P/N : E399300100)	

