



## 84" ULLTRA HD HIGH BRIGHTNESS 2,500 NIT LCD MODEL DS841LR4-1

The DS841LR4-1 is the largest professional high brightness LCD offering from DynaScan, measuring 84-inches diagonally. The display features a 4K UHD 84-inch IPS LCD with a high brightness LED backlight producing a 2,500 nit sunlight-viewable image. The DS841LR4-1 has been designed for large scale display applications in bright environments such as outdoor enclosures and storefront windows. Each screen is individually color calibrated to the D65 color standard to ensure uniformity among multiple displays.

Screen image simulated.





### Key Features

- 2,500 nit Maximum Brightness
- Ultra HD 4K Resolution
- IPS Technology
- LED Backlit with Local Dimming
- D65 Color Calibrated
- Blackening Defect Free in Direct Sunlight

# 84" ULLTRA HD HIGH BRIGHTNESS 2,500 NIT LCD

## MODEL DS841LR4-1

PANEL	
LCD Panel Type	84.04 inches IPS LCD
Native Resolution	3840 x 2160
Backlight	Direct LED
Brightness	2500 nit
Default Color Temperature	D65 (6500 K)
Contrast Ratio	3,000:1
Response Time	12 ms (typ)
Viewing Angle	178° / 178°
Light Life Time	50,000 hrs (typ.)
Blackening Defect Free	Up to 110°C (230°F)
Panel Surface	AG Haze 10%, 3H
POWER	
Power Supply	Internal
Rated Voltage	200 V ~ 240 V, 50 Hz / 60 Hz
Power On Mode	1200 W (typ), 2050 W (max)
Power Saving Mode	< 1 W
AC Out	< 100 W
MECHANICAL SPECS	
Bezel Width (T/B/L/R)	26 / 26 / 20 / 20 mm
Cabinet Color	Black
Monitor Dimension (LxHxD, w/o stand)	1907 x 1105 x 173.5 mm
Monitor Weight (set/package)	115 kg / 130 kg
VESA Mounting (dimension)	400 x 400 mm, 1000 x 400 mm
Fanless Design	No
Orientation	Portrait / Landscape
USER INTERFACE	
Language	English
Daisy Chain	RS-232
Proof of Image Retention	Yes
Dimming Control (DCR)	Yes
On/Off Scheduling	Yes
Ambient Light Sensor	Yes
Total Turn-on time	Yes
Internal Temperature Sensor	Yes
Network Control	RS-232, RS-485 (RJ45)
OSD Menu Rotation	Yes
Carrying Handles	Yes
I/O PORTS	
DVI-D	In (x1)
DisplayPort	In (x1)
VGA	In (x1)
USB	In (x1 Service Port)
RS-232	In (x1), Out (x1)
RJ-45	In (x1)
Audio	In (x1), Out (x1)
ACCESSORIES	
Included Accessories	Power Cord, DVI cable, RJ45 cable, RS232 cable, Remote controller, Batteries, QSG
Optional Accessories	Extension Sensor Kit
ENVIRONMENT	
Operating Temperature	0° C ~ 45° C
Storage Temperature	-20° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing
CERTIFICATION	
CE / FCC / ROHS	

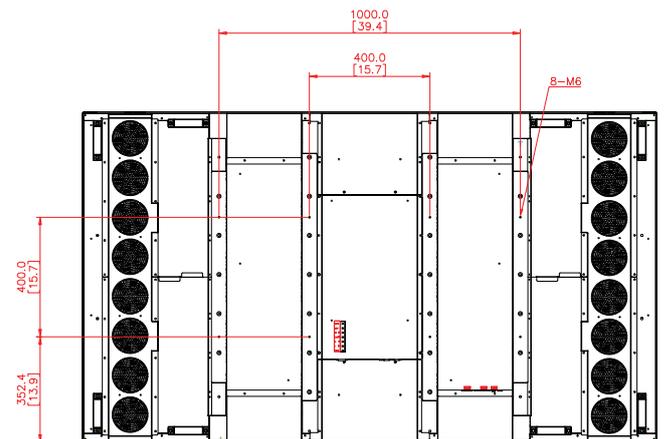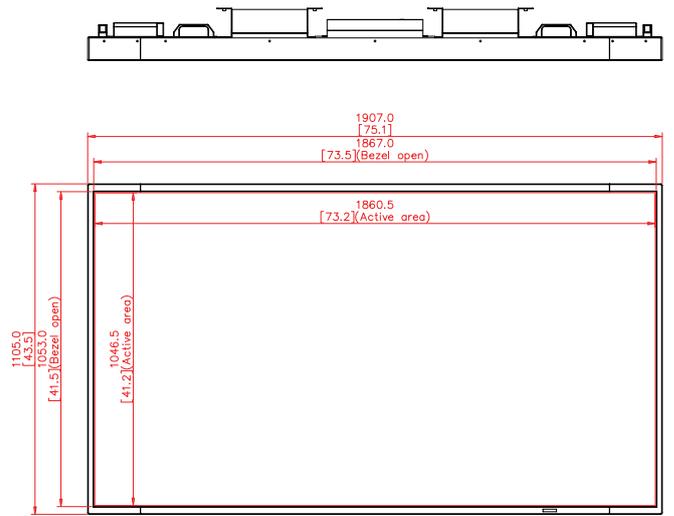

For More Information, Contact DynaScan:

Tel: +1 949-421-0348, +1 866-508-4848

Email: [info@dynascandisplay.com](mailto:info@dynascandisplay.com)

Online: [www.dynascandisplay.com](http://www.dynascandisplay.com)