
# Getac









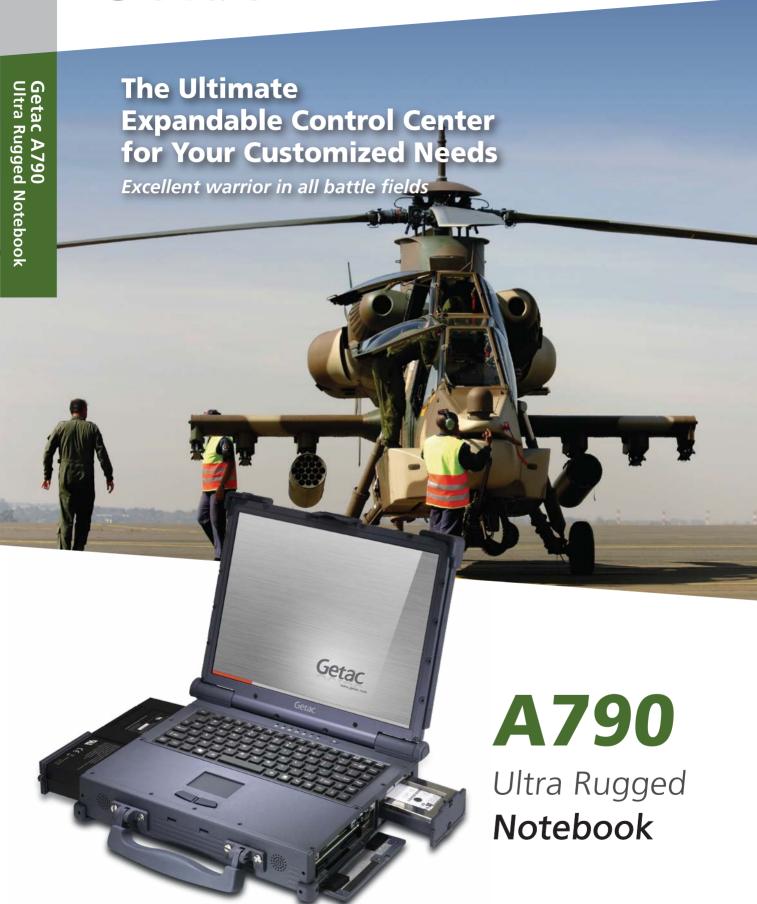



Backlit Keyboard

Fanless

X Bay

Expansion Unit

3 5G WWAN

- Multiple Bay Feature Maximizes Flexibility and Customized Applications
- 14.1" QuadraClear™ Sunlight Readable Display
- MIL-STD-810G Certified and IP65 Compliance
- Full Magnesium Alloy Case
- **Sealed Ports and Connectors**
- Shock-protected Removable HDD
- Vibration & Drop Resistant
- Versatile Wireless Access: WLAN, WWAN, and Bluetooth
- Fan-less Design



The Getac A790 is the latest ultra-rugged model of the Getac Rugged Notebook Family. This extremely rugged notebook not only meets MIL-STD-810G certified and IP65 compliance ratings to survive the harshest environments, but also satisfies critical EMI requirements.

A high performance 14.1" TFT sunlight readable LCD provides consistent and efficient operation along with a shock-protected HDD, and a wide range of ambient temperature features.

The A790 also possesses multiple bays for extensive versatility and expandability. Users have the luxury of employing the bays with additional removable HDDs for storage capacity expansion, auxiliary batteries for extended use, or other additional modules such as Bluetooth, GPS, and more.

Complementing this multifunctional rugged unit are the state-of-the-art authentication capabilities including a TPM chip, a fingerprint scanner, and a smart card reader, to safely protect confidential information.

## Interface







# **Back Side**

- DC in lack x 1
- USB 2.0 × 2
- Docking Connector × 1 Serial Port × 1
- LAN (RJ45) × 1 Modem (RJ11) × 1
- External VGA x 1 Parallel Port x 1

- IrDA × 1

#### **Left Side**

- Primary Battery Pack x 1
- X Bay x 1

#### **Right Side**

- IEEE 1394b × 1
- Audio Output x 1
- Speakers × 2 Microphone × 1
- Media Bay x 1
- Shock-protected HDD × 1
- PCMCIA Slots (Type II × 2 or Type III × 1)

# **Industry Applications**



## **Military**

A790 - MIL-STD-810G certified and IP 65 compliance - is the best rugged solution supporting air force, army, and navy combat operations. It features multiple bays that enable extensive versatility and expandability required by the military market. A790 facilitates asset management to track numerous military equipments components and relevant information is reported to commands by wireless transmission to ensure timely maintenance, repair, or replacement.



### Manufacturing

The shock-protected removable HDD, fan-less design and sealed I/O ports are A790's unique features to ensure effectiveness and stability under extreme environments. Its expansion unit connects equipment and facilities in order to conveniently control and monitor their operation. The ultra shock mount and vehicle dock customized for A790 make this rugged unit highly available and effective under various mission critical environments.



### **Public Safety**

Boarder patrollers and customs officers responsible for crackdown on illegal immigrants or smuggling are able to use the extremely rugged A790 that enables effective Confidential surveillance. information is protected by A790's advanced TPM chip, fingerprint scanner, smart card reader, and data analysis and databank establishment are facilitated by wireless transmission.

# **Optional Accessories**



Vehicle Dock W x D x H: 348 x 310 x 215mm (13.70" x 12.20" x 8.46")

- DC in Jack x 1
- Video Capture x 1
- USB 2.0 × 2
  - Speaker x 2
- Serial Port x 2
- Parallel Port x 1



**Ultra Shock Mount** W x D x H: 420 x 390 x 153mm (16.54" x 15.35" x 6.02")



Vehicle Mount W x D x H: 310 x 302 x 111mm (12.20" x 11.89" x 6.02")



Carry Bag



**Battery Charger** 





Main Battery (7800mAh)



Multimedia Bav 2nd Battery (5200mAh)



**PCI-Express Expansion Unit** (x 2 slots)



X Bay 3rd Battery (5200mAh)



Vehicle Adapter (90W, 11-16VDC and 22-32VDC)



Stylus



ISA Expansion Unit (x 2 slots)



**PCI Expansion Unit** (x 2 slots)





External USB FDD



Port Replicator

# **Specifications**

**Mobile Computing Platform** 

Genuine Windows® 7 Professional Operating System Genuine Windows Vista® Business

Intel® Centrino® Technology - Intel® Core™ Duo Processor L2400 1.66 GHz or Intel® Core™2 Duo Processor L7400 1.5 GHz

- 667 MHz FSB - 4MR L2 cache

- Mobile Intel® 945GM Express chipset

Intel® Graphics Media Accelerator 950 VGA Controller

Max. 128MB shared memory

14.1" TFT LCD XGA (1024 x 768) Display

Optional QuadraClear™ sunlight readable display with

touchscreen

Storage & Memory 2GB DDR2 expandable to 4GB SATA HDD 160GB / 320GB

Optional SATA SSD 80GB

Keyboard Rubber keyboard

Optional LED backlit rubber keyboard

**Pointing Device** Touchscreen

- Optional pressure sensitive touchscreen

Touchpad

- Glide touchpad with scroll bar - Optional resistive touchpad

**Expansion Slot** PCMCIA Type II x 2 or Type III x 1

Multimedia Bay Optional DVD super multi drive

Optional 2nd battery

Optional 2nd storage: HDD 160 GB

X Bav Optional RS232/422

Optional Ultra320 SCSI

Optional 2nd PCMCIA (Type II x 2 or Type III x 1)

Optional smart card reader

Optional Bluetooth (v2.0 + EDR class 1) Optional GPS (with mouse type antenna) Optional GSM / GPRS / EDGE / UMTS / HSDPA

Optional Bluetooth + GPS

Optional Bluetooth + GSM / GPRS / EDGE / UMTS /

HSDPA

Optional GPS + GSM / GPRS / EDGE / UMTS / HSDPA Optional Bluetooth + GPS + GSM / GPRS / EDGE / UMTS

/ HSDPA

Each A790 can only install one X-Bay optional item.

Battery life testing conducted under BatteryMark 4.0.1. Battery performance will vary upon software applications, wireless settings, power management settings, LCD brightness, customized modules and environmental conditions. The battery has a limited number of charge cycles and may eventually need to be replaced by a Getac service provider. Battery life and charge cycles vary by use and settings.

Weight varies from configurations and optional accessories.

Tested by a national independent third party test lab following MIL-STD-810G.

Serial port (9-pin; D-sub) x 1 I/O Interface

Parallel port (25-pin; D-sub) x 1 External VGA (15-pin; D-sub) x 1 Microphone (Mini-jack) x 1 Audio output (Mini-jack) x 1

DC in Jack x 1 USB 2.0 (4-pin) x 2 Modem (RJ11) x 1 LAN (RJ45) x 1 IEEE 1394b x 1

Docking connector (80-pin) x 1

Communication Interface 10/100/1000 base-T Ethernet

56K ITU V.92 modem

Intel® WiFi Link 5100; 802.11 a/b/g/n Optional Bluetooth (v2.0+EDR class 2)

Optional GPS

Optional GSM / GPRS / EDGE / UMTS / HSDPA

Software Adobe® Reader®

Security Feature TPM 1 2

Optional fingerprint scanner Optional smart card reader

Kensington lock

Power AC Adapter (90W, 100-240VAC, 50 / 60Hz)

Battery - Primary: Li-Ion smart battery (7800mAh)ii - Optional Bay 1: Li-Ion smart battery (5200mAh) - Optional Bay 2: Li-Ion smart battery (5200mAh)

Dimension (W x D x H) & 332.2 x 279 x 85.4 mm (13.08" x 10.99"x 3.37"),

Weight

5.9 kg (13 lbs)ii

MIL-STD-810G certified and IP65 compliance Rugged Feature

Optional MIL-STD-461F certified Full magnesium alloy case Shock-protected removable HDD Vibration & drop resistant

**Environmental Specification** Temperature<sup>iv</sup>:

Operating: 0°C to 60°C / 32°F to 140°F Optional low temperature: -20°C / -4°F Storage: -40°C to 71°C / -40°F to 160°F

Humidity:

- 95% RH , non-condensing







# **Getac EUROPE**

**Germany Office -**Getac Technology GmbH Kanzlerstrasse 4 40472 Düsseldorf Germany Tel: +49 211 984 8190

**Italy Office** Via Belvedere, 57 20043 Arcore (MB), Italy Tel. +39 039 617720

UK Office - Getac (UK) Ltd. Mitac house, Nedge Hill, Telford, Shropshire, TF3 3AH, U.K. Tel: +44 1952 207 231

# Getac NORTH AMERICA - Beijing Office:

USA Office - Getac Inc. 43 Tesla, Irvine, CA 92618, USA Toll Free: +1 886 GO GETAC (1 886 464 3822)

#### **Getac ASIA** China Office -

#### Getac Mobile Ltd. - Kunshan Office:

No.300 (Building, Processing Zone), No.1 Avenue, Export Processing Zone, Changjiang South Road, Kunshan City, Jiangsu, China Tel: +86 512 57366000 # 1408 Fax: +86 512 57382090

#### - Shanghai Office:

2/F, No.213, Jiangchang Third Road, Zhabei District, Shanghai, China Tel: +86 21 61431188 # 1032 Fax: +86 21 61401023

Room 501, Haowei Building, No.25 Beitai Pingzhuang Rd., Haidian District, Beijing, China Tel: +86 10 62381104 +86 10 62381108 # 2040

# Japan Office -

MiTAC Japan Corporation Yasuda 8th Building 6F, Kaigan 3-chome 3-8, Minato-ku, Tokyo, 108-0022, Japan Tel: +81 3 3769 8311 # 6411

#### Taiwan Office -**Getac Technology Corporation** 5F, Building A, No. 209,

Section 1, Nangang Rd., Nangang Dist., Taipei City, 11568, Taiwan, R.O.C. Tel: +886 2 2785 7888

# **SALES CONTACT**

#### **North America** ruggedsales@getac.com

South America sales-getac-SAmerica@getac.com

#### **EMEA**

sales-getac-EMEA@getac.com - Germany:

sales-getac-DACH@getac.com

sales-getac-Italy@getac.com

sales-getac-UK@getac.com

#### **Asia Pacific**

sales-getac-APAC@getac.com

- China:

sales-getac-China@getac.com

sales-getac-Japan@getac.com

# MARKETING CONTACT

Globalmarketing@getac.com

# North America

NorthAmericamarketing@getac.com

# South America

SouthAmericamarketing@getac.com

EMEAmarketing@getac.com

# Asia Pacific

APACmarketing@getac.com