

Giada D360

High-Performance for High-End Digital Signage Usage



Features





- 6th Generation Intel® Skylake-S Series Processor
- Up to three Independent Displays with 4K Resolution
- Max. 32GB DDR4, Dual Channel
- Great Connectivity and Expandability

Specifications

RoHS CE FCC

| | | D360H-B0000 |
|---------------------------|----------------------|--|
| Processor | CPU | 6 th Generation Intel® Skylake-S Series Processor |
| | Chipset | Intel® H110 Express |
| | BIOS | AMI EFI 64 Mbit |
| Memory | Type | DDR4 2133MHz |
| | Socket | 2 x U-DIMMs (284 pin) |
| | Max Size | 32 GB |
| Graphics | GPU | Integrated Intel® HD Graphics |
| | Graphic Engine | DirectX12, OpenGL4.4 and OpenCL 1.2 |
| | DP1.2 | 2 x DP (Max. 4096 x 2304 @60Hz) |
| | HDMI1.4b | 1 x HDMI (Max. 4096 x 2304 @24Hz) |
| Network | Controller | 1 x Gigabit Ethernet, Realtek RTL8111F |
| | Interface | 1 x RJ45 |
| I/O | USB | 4 x USB 3.0, 2 x USB 2.0 |
| | Display Interface | 2 x DP1.2, 1 x HDMI1.4b |
| | LAN | 1 x RJ45 |
| | Audio | 1 x MIC-IN, 1 x LINE-IN, 1 x AUDIO OUT |
| | Mini-PCle (Internal) | 1 x Half-length Mini-PCle with Wi-Fi/BT Module support |
| | Serial Port | 2 x COM (5V/12V) |
| | PS/2 | 2 x PS/2 |
| | LED Indicators | 1 x Power, 1 x HDD Access |
| Storage | 2.5" Drive Bay | 1 x 2.5" SATA drive bay (Max Height 7.5mm) |
| | mSATA | 1 x mSATA III |
| | M.2 | 1 x M.2 (PCIe) |
| JAHC (JEHE Patented Tech) | WatchDog Timer | Yes, 0~255 Second Time Out Support |
| | Auto Power On | Yes, Power Activated Automatically Start |
| | RTC | Yes, Set Up Independently Every day, A Week as a Cycle |
| | Power Remote Control | Yes, By IR Controller |
| | Wake On Lan | Yes |
| Operation System | Windows | Windows 7, 8.1, 10 |
| | Linux | Supported |
| | Android | N/A |
| Power | Power Type | DC-IN |
| | Power Adapter | 19V / 4.74A |

| D360H-B0000 | | |
|---------------|------------------------|---|
| Mechanical | Dimensions (W x D x H) | 236mm x 175mm x 50mm |
| | Fanless | No |
| | Construction | Metal |
| | Mounting | Desk/Wall Mounting and VESA Mounting Kit (Optional) |
| | Weight | 1.6 kg (3.53 lb) |
| Environment | Operating Temperature | 0°C ~ 40°C at 0.7m/s air flow |
| | Storage Temperature | -20°C ~ 60°C |
| | Relative Humidity | 95%@40°C (non-condensing) |
| Certification | EMC | CE/FCC Class B, CCC |
| | Safety | CE/FCC LVD, CCC |

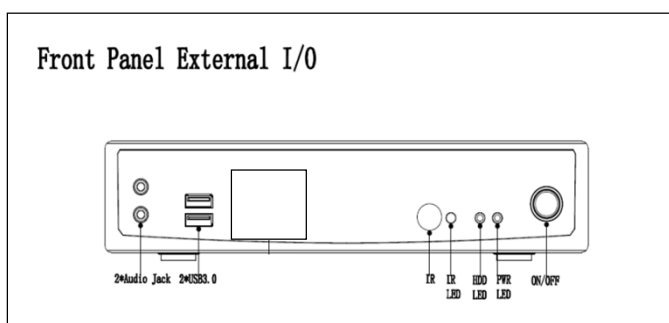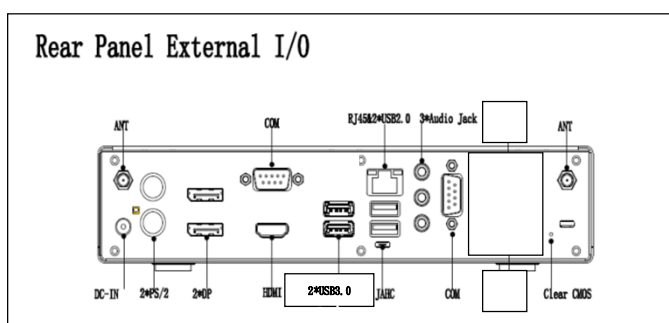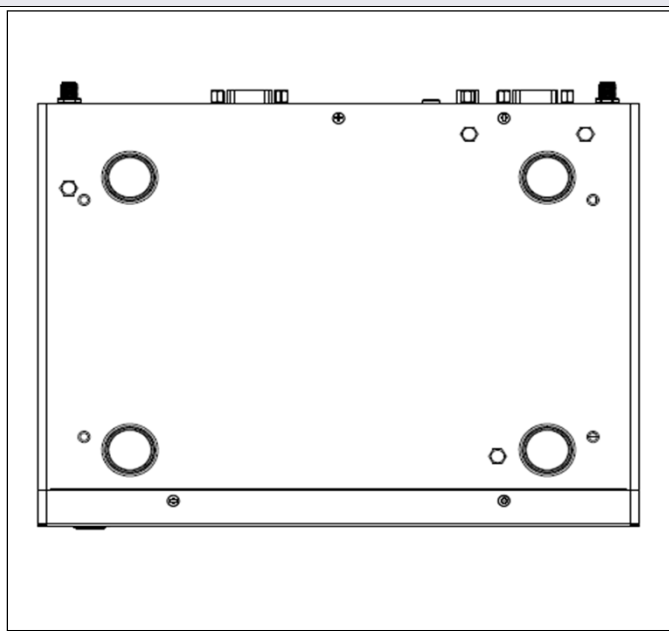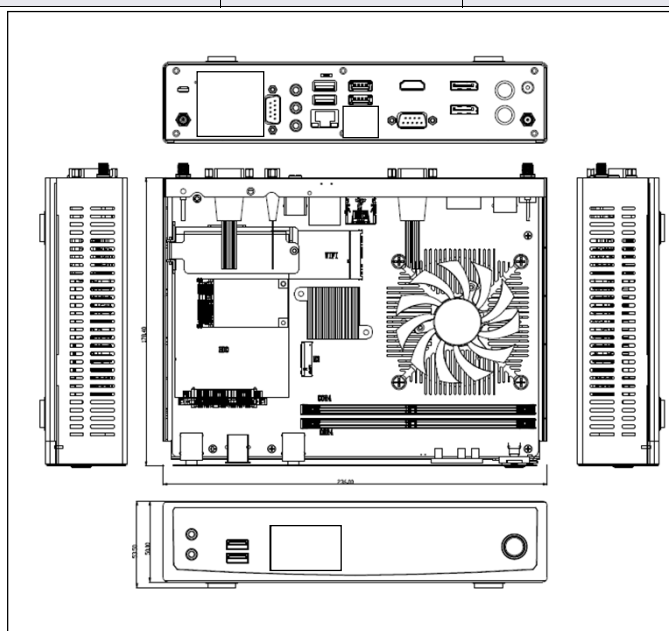

Order Information

| Part Number | Intel CPU | RAM | DP | HDMI | GbE | USB | COM | Mini-PCIe | mSATA | Operating Temperature |
|-------------|--------------------------------------|------------|----|------|-----|--------------------------|-----|-----------|-------|-----------------------|
| D360H-B0000 | 6 th Gen Skylake-S Series | up to 32GB | 2 | 1 | 1 | 4 x USB3.0 2 x USB2.0 | 2 | 1 | 1 | 0°C ~ 40°C |

Packing List

| Part Number | Description | Part Number | Description |
|-------------|--------------------|-------------|-------------------|
| - | 1 x D360 | - | 1 x Driver Disk |
| - | 1 x User Manual | - | 1 x Power Adapter |
| - | 1 x AC power cable | - | 1 x Wi-Fi antenna |

The product appearance, specifications and features are subject to change. Giada reserves the right of final interpretation for the content hereinabove.