



SSF/SSH1916-I V1

19.1" LCD, 1200nits, LED backlight, 1920 x 388 ultra-wide aspect ratio 16:3.2

The SSF/SSH1916-I is a 19.1 inch color TFT-LCD display with special aspect ratio 16:3.2 and wide resolution 1920 x 388. It is Litemax's Spanpixel series product which designed for high brightness with power efficiency LED backlight. It provides LCD panel with specific aspect ratios and sunlight readable for digital signage, public transportation, exhibition hall, department store, and vending machine.

Key Features

- Resizing LCD
- Ultra Wide Screen 16:3.2
- LED Backlight
- Brightness 1200nits
- Low Power Consumption
- BL MTBF: 100,000 hours



-								
5	n	ρ	CI	т	са	ы	O	ns
~	P	-	•••				-	

Model Name	SSF/SSH1916-I				
Description	19.1" TFT LCD, 1200nits LED backlight , 1920 x 388				
Screen Size	19.1″				
Display Area (mm)	476.064(H) x 96.204(V)				
Brightness	1200 cd/m ²				
Resolution	1920 x 388				
Aspect Ratio	16:3.2				
Contrast Ratio	7100 : 1				
Pixel Pitch (mm)	0.24795(H) x 0.24795(V)				
Pixel Per Inch (PPI)	102				
Viewing Angle	178°(H),178°(V)				
Color Saturation (NTSC)	81%				
Display Colors	16.7M				
Response Time (Typical)	20ms				
Panel Interface	LVDS				
Input Interface	VGA, DVI-D, HDMI				
Input Power	DC12V				
Power Consumption	10.8W, 16.5W (with AD board)				
OSD Key	4 Keys (Power Switch, Menu, +, -)				
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Positionetc				
Dimensions (mm)	497.60x121.30x16.55				
Bezel Size(U/B/L/R)	12.548/12.548/10.768/10.768 mm				
Weight (Net)	0.74Kg				
Operating Temperature	0 °C ~ 50 °C				
Storage Temperature	-20 °C ~ 60 °C				

SSF = Panel + LED Driving Board


SSH = Panel + LED Driving Board + AD Control Board


All brands or product names are trademarks or registered trademarks of their respective companies.


Mechanical Drawing

Outline Dimensions




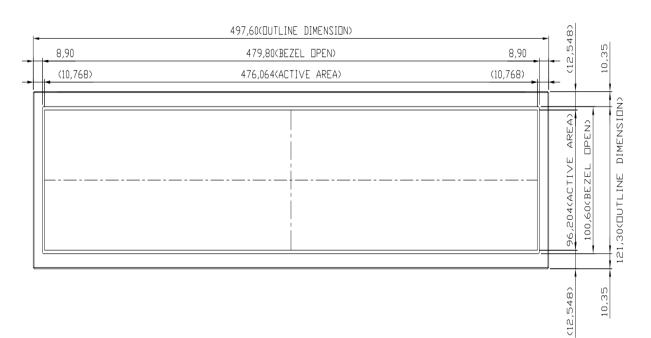


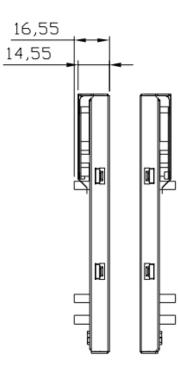





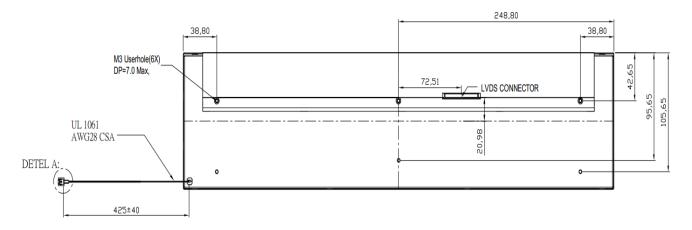



Note :

1.THE DIMENSION EXCLUDES DEFORMATION.

2. MODULE THICKNESS TO BE 16.55mm MAX.

2.ALLOW ED DEPTH OF USERHOLE SCREW INSERTION IS 7.0mm MAX.

3. USER SCREW TORQUE=3.0 kgf/cm MAX.



Ordering Information					
Part Number	Description				
SSF1916-INN-A01	19.1",1200nits,1920*388,LID19C,5in1,V1				
SSH1916-INN-Q01	19.1",1200nits,1920*388,AD8891GDH w/LID,DC12V,5in1,V1				
	Optional Accessories				
Part Number	Description				
840612051212	ADAPTER,AC/DC,12V/5A,60W,Power-Din-4P,CWT,G99-ABF060F-N022,Efficiency-level-6,R				
810618301010	CABLE,POWER,AC,1830mm USA type				
810618301090	CABLE, POWER, AC, 1830mm Europe type				
810618301050	CABLE,POWER,AC,1830mm UK type				
810618301170	CABLE, POWER, AC, 1830mm Australia type				
810618301031	CABLE, POWER, AC, 1830mm Japan type				
	Customer request				
Touch	SCT (Single-Touch), PCT (Multi-Touch)				
Glass	Tempered glass, AR coating				