

### SSF/SSH6740-I V1

## 67.4" Resizing LCD,2000 nits LED backlight,3840 x 1076 ultra-wide aspect ratio 16:4.4

The SSF/SSH6740-Lis a 67.4 inch color TFT-LCD display with special aspect ratio 16:4.4 and wide resolution 3840 x 1076. It is Litemax's Spanpixel series product which designed for high brightness 2000 nits with power efficiency LED backlight. It provides LCD panel with specific aspect ratios and sunlight readable for digital signage, public transportation, exhibition hall, department store, and vending machine.

#### **Key Features**

- Resizing LCD
- Ultra-Wide Screen (16: 4.4)
- High Brightness 2000 nits
- Sunlight Readable
- LED Backlight
- BL MTBF: 100,000 hours



Specifications Specifications Specifications Specifications Specifications Specifications Specification Specificat		
Model Name	SSF/SSH6740-I V1	
Description	67.4" Resizing LCD, 2000 nits LED backlight, 3840x1076	
Screen Size	67.4"	
Display Area (mm)	1650.240(H) x 462.680(V)	
Brightness	2000 cd/m <sup>2</sup>	
Resolution	3840x1076	
Aspect Ratio	16 : 4.4	
Contrast Ratio	5600:1	
Pixel Pitch (mm)	0.430(H) x 0.430(V)	
Pixel Per Inch (PPI)	59	
Viewing Angle	178°(H),178°(V)	
Color Saturation (NTSC)	84%	
Display Colors	1.07G	
Response Time (Typical)	9.5ms	
Panel Interface	V-by-One	
Input Interface	DVI-D, HDMI, DP	
Input Power	AC100~240V	
Power Consumption	262W, 271W (with AD board)	
OSD Key	5 Keys (Power Switch, Menu, +, -, Exit)	
OSD Control	Brightness, Color, Contrast, Auto Turing, H/V Positionetc	
Dimensions (mm)	1696.3 x 497 x 28.2	
Bezel Size(U/B/L/R)	17.16/17.16/23.03/23.03 mm	
Weight (Net)	19.3 kg	
Operating Temperature	0 °C ~ 50 °C	
Storage Temperature	-20 °C ~ 60 °C	

SSF= Panel + LED Driving Board

SSH= Panel + LED Driving Board + AD Control Board


Specifications are subject to change without notice.


All brands or product names are trademarks or registered trademarks of their respective companies.




# **Mechanical Drawing**


Outline Dimensions Unit: mm

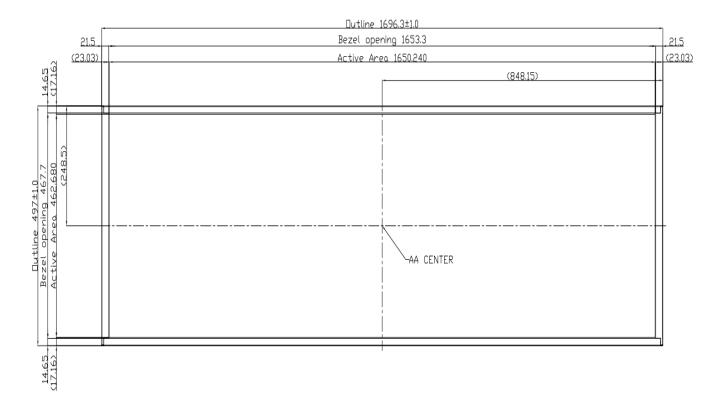

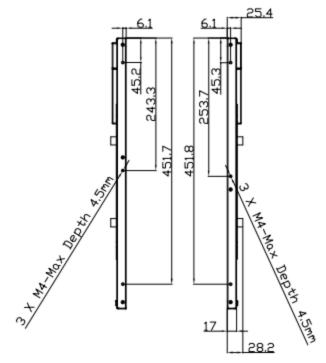



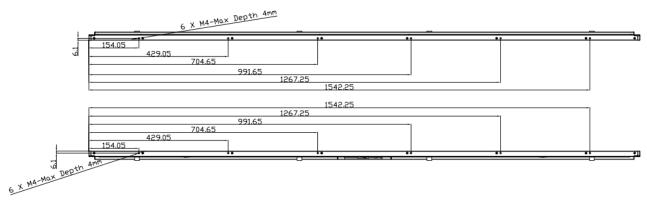

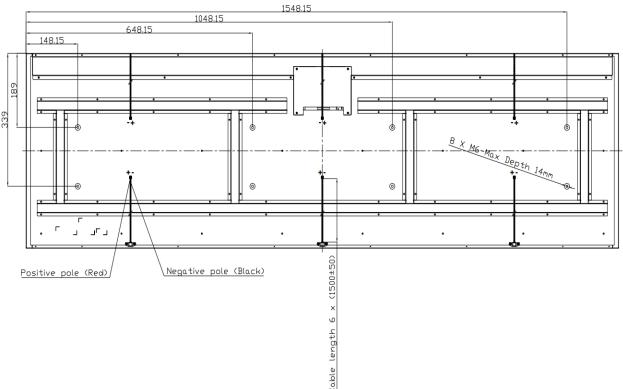

# Note:

- 1. Tolerance is ±0.5mm unless noted.
- 2."( )" marks the reference dimension.



Ordering Information		
Part Number	Description	
SSF6740-INU-A01	67.4",2000nits,3840X1076,LID67C,V1	
SSH6740-INU-N01	67.4",2000nits,3840X1076,LID67C,AD2796DHP,AC100~240V,V1	

Optional Accessories		
Part Number	Description	
810618301010	CABLE,POWER,AC,1830mm USA type	
810618301090	CABLE,POWER,AC,1830mm Europe type	
810618301050	CABLE,POWER,AC,1830mm UK type	
810618301170	CABLE,POWER,AC,1830mm Australia type	
810618301031	CABLE,POWER,AC,1830mm Japan type	
By Customer Request		

By Customer Request	
Glass	Tempered glass, AR coating