



Main Features

- ♦ IP65-rated rugged design
- ♦ Intel Atom® x7 , 4c, 2.0GHz E3950 (Apollo-lake)
- ♦ 9~36VDC with ignition control
- ♦ Built-in GPS with optional dead reckoning
- ♦ Up to two WLAN or two 3G/LTE via 3 mini-Pcie slots
- ♦ Electrical isolation for CAN 2.0B & GPI/O
- ♦ Optional OBD Function (SAE J1939/J1708)
- ♦ Rich and various GbE, USB 2.0, serial I/O and storages
- ♦ Compliant to E-mark and ISO 7637-2
- ♦ Compliant to MIL-STD-810G in vibration/shock

Product Overview

MVS 2620-IP, an IP65-rated rugged enclosure, maintenance-free box computer, is ideal for data acquisition in extreme environments throughout a number of in-vehicle applications, like transportation, heavy duty and waste management, etc. All external interfaces, including Gigabit Ethernet, isolated CAN Bus and digit I/O, USB, and RS232/485 serial ports, are implemented on IP67-proof connectors for reliable data transmission in harsh and rugged environments.

MVS 2620-IP is a modular design, it is flexible to use other kinds of expansion boards to extend different I/O functions for quickly tailored to a vast number of applications. Inside the system, there're four mini-Pcie slots with three SIM card slots offering WLAN, 3G/LTE, CAN OBD (SAE J1708/J1939) or CVBS functionality. Besides, it can operate at temperatures from -30°C~70°C under fanless.

MVS 2620-IP supports 9~36VDC power input with ignition managemnt and 12VDC at 2A maximun power output. It is compliant to E-mark and ISO 7637-2 in vehicle certificate and meet US military MIL-STD-810G, category 4, composite wheeled vehicle, for vibration and shock criteria.

Specifications

CPU

- ♦ Intel Atom® x7, 4C, 2.0GHz E3950 (Apollo Lake)

Memory

- ♦ 204-Pin DDR3L SO-DIMM socket support 1600MHz up to 8GB, 4GB industrial grade memory in default

Storage

- ♦ 1 x 2.5" SATA 3.0 SSD/HDD
- ♦ 1 x CFast (externally accessible)

Expansion

- ♦ 1 x Full size mini-Pcie socket (USB 3.0/2.0)
- ♦ 1 x Full size mini-Pcie socket (USB 2.0)
- ♦ 1 x Full size mini-Pcie socket (USB 2.0 + PCIe)
- ♦ 1 x Half size mini-Pcie socket (USB 2.0 + PCIe)

GPS and On Board Sensor

- ♦ 1 x Default U-blox NEO-M8N GNSS module for GPS/Gloness/QZSS/ Galileo/Beidou
- ♦ Optional modules with dead reckoning available
- ♦ Built-in G-sensor

Ethernet

- ♦ 2-Port 10/100/1000Mbps
- ♦ Controller: Intel® 1210-T1

Security

- ♦ TPM 2.0


I/O Interface-Front

- ♦ 6 x LED indicators for power/storage/WLAN/WWAN/status/health
- ♦ 1 x USB type A USB 2.0 port (w/lid)
- ♦ 1 x SIM slot (w/lid)
- ♦ 1 x Mic-in, 1 x Line-out, power & reset buttons for M12 connector
- ♦ 3 x Antenna holes for WWAN/GPS
- ♦ 1 x Expansion port (M12-type) reserved

I/O Interface-Rear

- ♦ Circular 22-pin:
 - 3x RS-232 (two for full, RI/5V/12V selectable)
- ♦ M12 8-pin
 - 1 x GbE
- ♦ M12 8-pin
 - 2 x USB 2.0
- ♦ M12 12-pin
 - 3-Bit GPO & 3-bit GPI
 - iButton
- ♦ M12 12-pin:
 - 1 x Line-out

Dimension Drawing

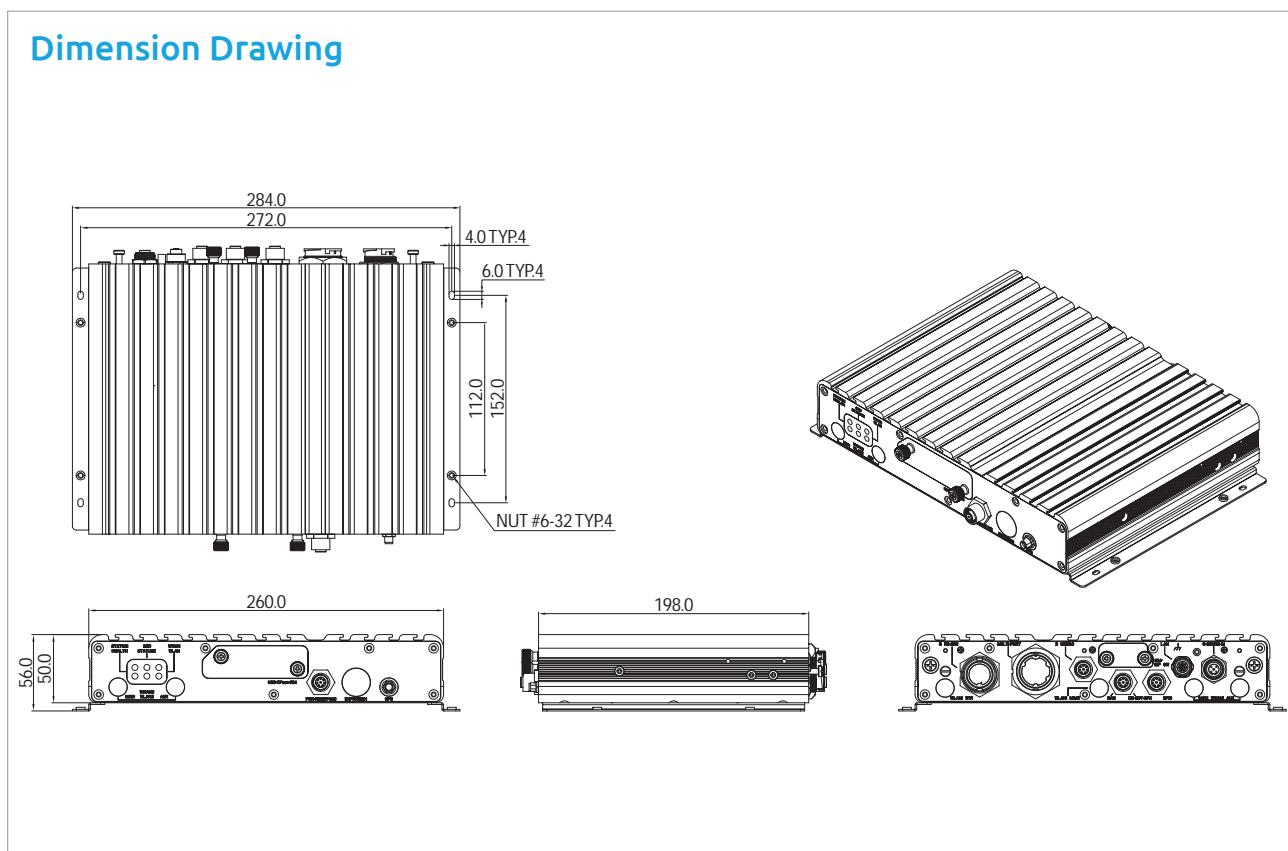

- DC12V-out, 2A max.
- OBD from optional VIOB-CAN-05/06 module (SAE J1708/J1939)
- 2 x CAN Bus 2.0B from optional VIOB-CAN-04 module
- ♦ Circular 31-pin:
 - 1 x VGA, resolution up to 2560 x 1600@60Hz
 - 1 x GbE
 - 2 x RS-485 (2-wire)
 - 1 x CAN 2.0B w/ isolation
- ♦ 6-Bit DIP switch (w/lid)
 - 3 x Digital inputs
 - Source-type: 9~36V-in (default)
 - External-type: 0~33VDC pull-high
 - Isolation
 - 3 x Digital outputs
 - Source-type: 9~36V-in (nominal 35 mA@24V) (default)
 - External 5~27VDC pull-high, sink current: typical 220mA for each bit, 500mA max. (@25°C)
 - Isolation
 - Source or external selected by 6-bit DIP Switch
- ♦ 1 x SIM card socket (w/lid) and 1x internal SIM card socket selectable
- ♦ 4 x Antenna holes for WLAN/WWAN
- ♦ 1 x M12 S-code for 9~36VDC-IN

Power Management

- ♦ Selectable boot-up & shut-down voltage for low power protection by software. Setting 8-level power on/off delay time by software. Support S3/S4 suspend mode

Operating System

- ♦ Windows 10 64-bit only, Linux YOCTO

Dimensions

- ♦ 260 x 198 x 50 (W x D x H) (mm) (10.24" x 7.80" x 1.97")
- ♦ 2.88kg

Environment

- ♦ Operating temperatures
-30°C~70°C (w/industrial SSD) with air flow
- ♦ Storage temperatures: -40°C~80°C
- ♦ Relative humidity: 10%~90% (non-condensing)
- ♦ Vibration (random)
1.2g@5~500 Hz (in operation, HDD), 2.5g@5~500 Hz (in operation, SSD)
- ♦ Vibration (SSD)
 - Operating: MIL-STD-810G, 514.6C, category 4
 - Storage: MIL-STD-810G, 514.6, category 24, minimum integrity test
- ♦ Shock (SSD/HDD)
 - Operating: MIL-STD-810G, Method 516.6, procedure I, functional shock=20g
 - Non-operating: MIL-STD-810G, Method 516.6, procedure V, crash hazard shock test=75g

Certifications

- ♦ CE approval, FCC Class A, E13

Ordering Information

♦ MVS 2620-IPK (P/N: 10VS0262000X0)

Intel Atom® 4c E3950 (Apollo-lake) 2.0GHz, 4GB DDR3L industrial grade, 2 x GbE, VGA output, 3 x RS-232, 2 x RS-485, 3 x USB 2.0, 12VDC output, 1 x CAN 2.0B

♦ Cables Kit (P/N: 10VS0262001X0)

External cables for all the communication ports