


# GENE-ADP6

3.5" SubCompact Board with 12th Generation Intel® Core™ i7/i5/i3/Celeron® Processor SoC

SubCompact Boards

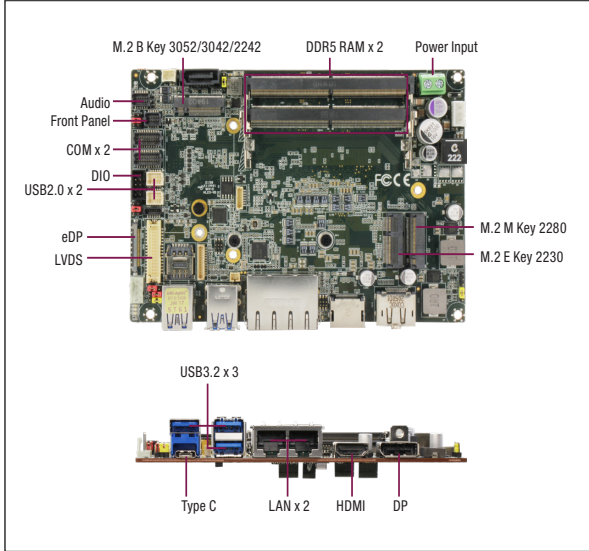

## Features

- Intel® Core i7/i5/i3/Celeron SoC
- DDR5 4800 MHz, Dual Channel SODIMM x 2, up to 64GB
- LVDS Dual Channel 18/24 bit x 1, eDP 1.4b, DP1.4a x 1, HDMI 2.1 x 1
- 2.5GbE x 1, GbE x 1, SATA III x 1, DIO x 8bit
- USB 3.2 Gen2 x 3 (Rear I/O), USB2.0 x 4 (Pin header), USB Type C x 1
- RS-232/422/485 x 4
- M.2 M-key 2280 x 1 (PCIe x4 Gen4)
- M.2 E-Key 2230 x 1 (PCIe, USB2.0)
- M.2 B-Key 3052/3042/2242 x 1 (PCIe x2, USB3.2+SATA, USB2.0), default: USB3.2+SATA
- Wide DC Input 9-36V (Optional: 12V Only)



## Specifications

SYSTEM	
FORM FACTOR	3.5" SubCompact Board
CPU	Intel® 12th Generation Core™/Celeron CPU i7-1270PE (12C/16T, 3.30GHz, up to 4.50GHz, 28W, TDP-up 64W) i7-1265UE (10C/12T, 3.50GHz, up to 4.70GHz, 15W, TDP-up 55W) i5-1250PE (12C/16T, 3.20GHz, up to 4.40GHz, 28W, TDP-up 64W) i3-1220PE (8C/12T, 3.10GHz, up to 4.20GHz, 28W, TDP-up 64W) Celeron® 7305E (5C/5T, 1.00GHz, 15W)
CHIPSET	Integrated with Intel® SoC
MEMORY TYPE	DDR5 4800 MHz, Dual Channel SODIMM x 2, up to 64GB
BIOS	UEFI
WAKE ON LAN	Yes
WATCHDOG TIMER	255 Levels
SECURITY	TPM2.0 (NPCT750AABYX)
RTC BATTERY	Lithium Battery 3V/240mAh
DIMENSION	5.75" x 4" (146mm x 101.7mm)
OS SUPPORT	Windows 10/11 (64bit) Linux Ubuntu 22.04/Kernel 5.15
POWER	
POWER REQUIREMENT	+9-36V or +12V
POWER SUPPLY TYPE	AT/ATX
CONNECTOR	Phoenix 2-pin Connector
POWER CONSUMPTION	Intel® Core™ i7-1270 PE, DDR5 32GB x 2, 5.72A@ +12V(TYPICAL) Intel® Core™ i7-1270 PE, DDR5 32GB x 2, 7.95A@ +12V(MAX)
DISPLAY	
CONTROLLER	Intel® Iris® Xe Graphics Intel® UHD Graphics
LVDS/eDP	LVDS Dual Channel 18/24bit x 1, up to 1920 x 1080 eDP1.4b HBR3, up to 3840 x 2160
DISPLAY INTERFACE	HDMI 2.1 x 1, up to 8K x 4K@60Hz or 4K2K 120Hz DP1.4a x 1, up to 7680 x 4320 60Hz 30bpp
MULTIPLE DISPLAY	Up to 4 Simultaneous Displays
AUDIO	
CODEC	Realtek ALC897
AUDIO INTERFACE	Line-in/Line-out/MIC
SPEAKER	—
EXTERNAL I/O	
ETHERNET	Intel® i219, 10/100/1000Base Intel® i226, 10/100/1000/2500Base
USB	USB3.2 Gen 2 x 3 USB Type C x 1 ( DP1.4a, PD 5V/3A)
SERIAL PORT	—
VIDEO	HDMI 2.1 x 1, DP1.4a x 1

INTERNAL I/O	
USB	USB2.0 x 4
SERIAL PORT	COM1,COM2 (RS232/422/485, supports 5V/12V/RI) COM3,COM4 (RS232/422/485)
VIDEO	LVDS/eDP x 1 Inverter x 1 (12V/2A)
SATA	SATA3.0 x 1 +5V SATA Power Connector x 1
AUDIO	Audio Header x 1
DIO/GPIO	8-Bit
SMBus/I2C	SMBus/I2C x1 (Default: SMBus)
TOUCH	—
FAN	Smart Fan x 1
SIM	Nano SIM x 1
FRONT PANEL	PWR LED, HDD LED, PWR button, HW Reset
OTHERS	—
EXPANSION	
Mini PCI-E/mSATA	—
M.2	M-Key 2280 x 1 (PCIe x4 Gen4) B-Key 3052/3042/2242 x 1 (PCIe x2, USB3.2+SATA, USB2.0, default: USB3.2+SATA) E-Key 2230 x 1 (PCIe, USB2.0)
OTHERS	FPC x1 (PCIe x4 Gen4, Only support Graphic or NVME)
ENVIRONMENT & CERTIFICATION	
OPERATING TEMP.	32°F ~ 140°F (0°C ~ 60°C)
STORAGE TEMP.	-40°F ~ 185°F (-40°C ~ 85°C)
OPERATING HUMIDITY	0% ~ 90% relative humidity, non-condensing
MTBF (HOURS)	344,735
EMC	CE/FCC Class A

## Optional Accessories

Part Number	Description	QTY
1702150155	SATA HDD Power, Cable 15cm	1
170204010R	Power Cable, 10cm	1
170X000156	Audio Cable, 25cm	1
1709100108	FRONT PANEL Cable, 10cm	1
170X000231	COM Port Cable, 30cm	2
170010010D	USB 2.0 Cable, 10cm	2
GENE-ADP6-FAN01	CPU Cooler:12V.4800RPM.Smart FAN	1
GENE-ADP6-HSP01	Heatspreader.146*80*11mm	1
GENE-ADP6-HSK01	Heatsink. 146*101.6*25mm	1

## Packing List


Description	QTY
GENE-ADP6 MB	1

# GENE-ADP6


06

Subcompact Boards

## Block Diagram

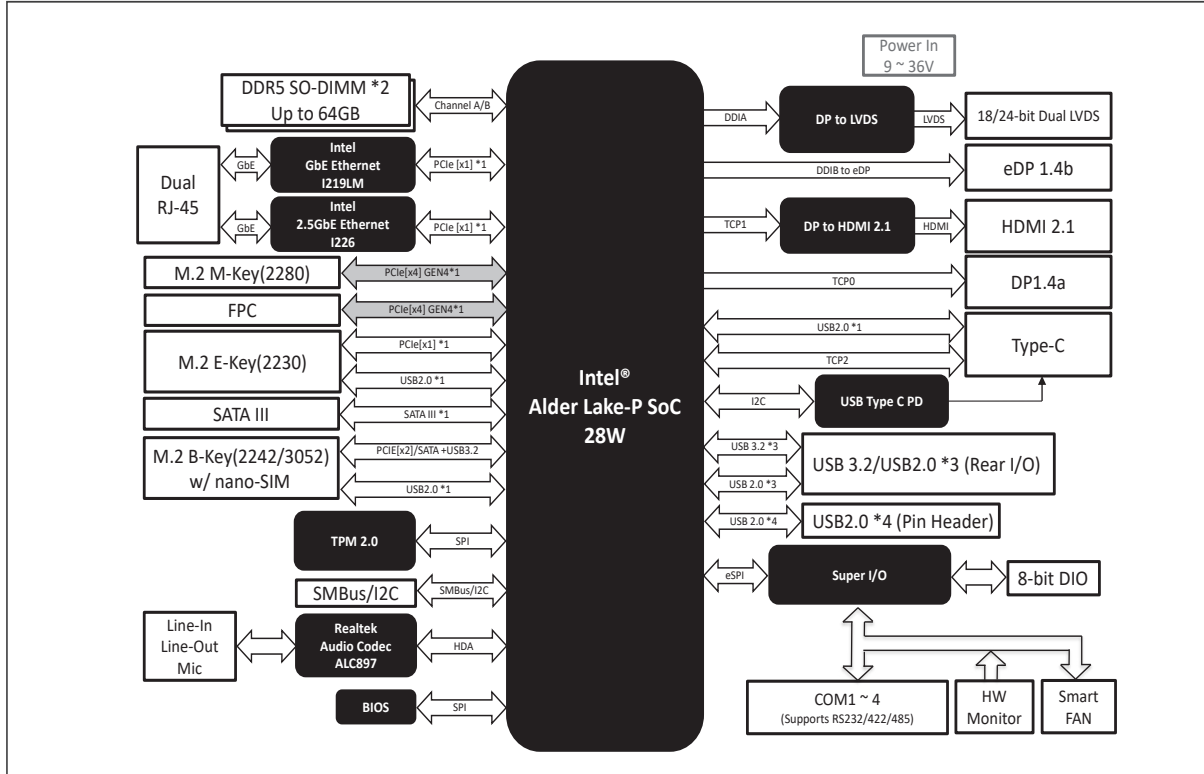

## Dimension Unit: mm

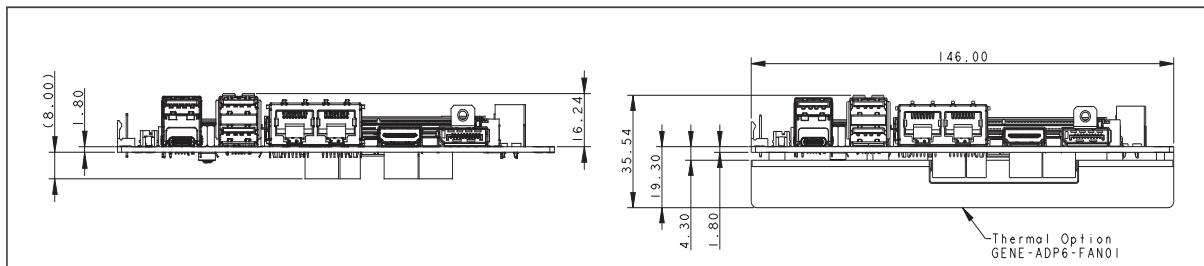

## Ordering Information

Part Number	CPU	Display	LAN	USB	COM	Storage	Expansion Slot	TPM	Power	Temp	Others
GENE-ADP6-A10-0001	i7-1270PE	HDMI x1 DP x1 LVDS x1 eDP x1 Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x 3 USB Type C x 1 USB 2.0 x 4	4	SATA x1	M-Key 2280 x 1 B-Key 3052 x 1 E-Key 2230 x 1	2.0	9~36V	0°C ~ 60°C	Audio, Nano SIM, DIO x 8, SMBUS
GENE-ADP6-A10-0002	i7-1265UE	HDMI x1 DP x1 LVDS x1 Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x 3 USB Type C x 1 USB 2.0 x 4	4	SATA x1	M-Key 2280 x 1 B-Key 3052 x 1 E-Key 2230 x 1	—	12V	0°C ~ 60°C	Audio, Nano SIM, DIO x 8, SMBUS
GENE-ADP6-A10-0003	i5-1250PE	HDMI x1 DP x1 LVDS x1 eDP x1 Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x 3 USB Type C x 1 USB 2.0 x 4	4	SATA x1	M-Key 2280 x 1 B-Key 3052 x 1 E-Key 2230 x 1	2.0	9~36V	0°C ~ 60°C	Audio, Nano SIM, DIO x 8, SMBUS
GENE-ADP6-A10-0004	i3-1220PE	HDMI x1 DP x1 LVDS x1 eDP x1 Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x 3 USB Type C x 1 USB 2.0 x 4	4	SATA x1	M-Key 2280 x 1 B-Key 3052 x 1 E-Key 2230 x 1	2.0	9~36V	0°C ~ 60°C	Audio, Nano SIM, DIO x 8, SMBUS
GENE-ADP6-A10-0005	Celeron-7305E	HDMI x1 DP x1 LVDS x1 Type-c DP x1	GbE x1 2.5GbE x1	USB 3.2 Gen 2 x 3 USB Type C x 1 USB 2.0 x 4	4	SATA x1	M-Key 2280 x 1 B-Key 3052 x 1 E-Key 2230 x 1	—	12V	0°C ~ 60°C	Audio, Nano SIM, DIO x 8, SMBUS

Note: All specifications are subject to change without notice.

www.aaeon.com

06-2

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660