

NVIDIA® Jetson Rugged Computer



NRU-170-PPC Series

IP66 Waterproof 10.1" AI Panel PC Powered by Jetson Orin™ NX/ Nano with 6x GMSL2 or 4x PoE+ GbE Ports



Key Features

- Powered by NVIDIA® Orin™ NX or Orin™ Nano SoM bundled with JetPack
- IP66 waterproof and dustproof
- 10.1" touchscreen with 1920 x 1200 resolution, 1000 cd/m2 brightness, 1000:1 high contrast ratio
- -25°C to 60°C fanless operation (No throttling at 60°C with MAXN TDP Mode)
- 6x GMSL2 automotive cameras via FAKRA Z connectors (NRU-171V-PPC)
- 4x PoE+ GbE via M12 X-coded connectors (NRU-172S-PPC)
- 1x CAN FD and 1x RS232 via M12 A-coded connectors
- 8V to 35V wide-range DC input with built-in ignition power control

CONTACT US

GET QUOTE

Introduction

The NRU-170-PPC series is an IP66-rated, 10.1" AI panel PC, powered by NVIDIA® Jetson Orin™ NX or Orin™ Nano, delivering up to 100 TOPS of AI processing capability. This series is tailored for edge AI applications that demand water resistance and human-machine interaction, including ADAS for off-highway vehicles, autonomous marine vessels, AI-driven inspection in food processing, smart livestock management, and precision agriculture.

Leveraging the NVIDIA® Jetson Orin™ NX, the NRU-170-PPC achieves superior AI inference, offering up to 100 sparse TOPS (INT8) and the ability to transcode up to 18 simultaneous 1080P video streams. The series also incorporates waterproof features at a competitive price point, accomplished through a refined mechanical design, the use of carefully selected waterproof connectors, and standardized cable kits. For adaptability in various semi-outdoor environments, the unit is equipped with a 10.1" touch panel boasting 1000 cd/m² brightness and a 1000:1 contrast ratio, with the added functionality of single-finger touch sensitivity in wet conditions.

The NRU-170-PPC series includes two models: the NRU-171V-PPC, supporting up to six GMSL2 automotive cameras with pre-integrated drivers for select cameras utilizing IMX390, ISX031, and IMX490 CMOS sensors; and the NRU-172S-PPC, which offers four PoE+ GbE ports for IP or industrial GigE cameras. Additionally, a waterproof GbE port is provided for interfacing with external computers or LiDAR. The NRU-170-PPC is designed as a compact, all-in-one edge AI platform that simplifies in-vehicle cabling. It supports an 8V to 35V wide-range DC input, ignition power control, a CAN FD bus port, and an RS232 port. Expansion options include a mini-PCIe socket for CAN/ COM/ WiFi modules and an M.2 B-key socket for 4G LTE/ 5G NR communication modules.

By integrating a 10.1" touch panel, IP66 rating, Orin NX AI performance, and comprehensive onboard camera connectivity, the NRU-170-PPC strikes an optimal balance between ruggedness, performance, cost efficiency, and ease of deployment. It represents a cutting-edge edge AI solution for applications in smart agriculture, mining, construction, smart animal husbandry, edge inspection, and outdoor autonomous mobile robots (AMRs).

Specifications


System Core		Internal I/O Interface	
Processor	NVIDIA® Jetson Orin™ NX system-on-module (SOM), comprising NVIDIA® Ampere GPU and ARM Cortex CPU	NVIDIA® Jetson Orin™ Nano system-on-module (SOM), comprising NVIDIA® Ampere GPU and ARM Cortex CPU	Mini PCI Express1x full-size mini PCI Express socket (PCIe + USB 2.0)
Memory	16GB/ 8GB LPDDR5 @ 3200 MHz on SOM	8GB/ 4GB LPDDR5 @ 2133 MHz on SOM	M.21x M.2 3042/3052 B key (USB 3.2 Gen 1 + USB 2.0) for LTE/5G module with dual micro SIM support
eMMC	N/A		
Touch Panel			
Panel	10.1" screen with a 1920x1200 resolution, 1000 cd/m² brightness, and a high 1000:1 contrast ratio		
Touch	Single-finger touch functionality when the screen is wet, with optical bonding, AG (Anti-Glare) and AF (Anti-Fingerprint) glass treatment		
Panel I/O Interface			
GMSL2	NRU-171V-PPC		
	6x waterproof GMSL2 FAKRA Z connectors, supporting multiple configurations: Configuration A. 6x AC-IMX390 (2MP@30FPS) Configuration B. 6x AC-ISX031 (3MP@30FPS) Configuration C. 4x AC-IMX490 (5MP@30FPS)		
	NRU-171V-PPC		
Ethernet Port	1x Gigabit Ethernet port via M12 X-coded 8-pin connector		
	NRU-172S-PPC		
	Port 0: 1x Gigabit Ethernet port via M12 X-coded 8-pin connector Port 1 to Port 4: 4x GbE ports by Intel® I350-AM4 via M12 X-coded 8-pin connector		
PoE+	NRU-172S-PPC		
	IEEE 802.3at PoE+ PSE for Port 1 to Port 4 with 50W total power budget		
USB	2x USB 2.0 ports via M12 A-coded 8-pin connector 1x USB Type C port (for system flashing and OTG, under service door)		
Serial Port	1x RS-232 port via M12 A-coded 8-pin connector		
CAN bus	1x CAN FD port via M12 A-coded 8-pin connector		
Isolated DIO	1x isolated GPS PPS input via M12 A-coded 8-pin connector		
Power Supply			
DC Input	8V to 35V DC input and ignition power control via M12 A-coded, 5-pin connector (IGN/ GND/ V+) ^[1]		
Mechanical			
Dimension	257 mm (W) x 65 mm (D) x 176 mm (H)		
Weight	3.8 kg		
Mounting	VESA 75 mount (standard)		
Environmental			
Operating Temperature	-25°C to 60°C with passive cooling (MAXN TDP mode) ^[2] With full CPU+GPU stressing: NRU-170-PPC non-throttling at 60°C with 25W TDP mode (Orin NX MAXN)		
Storage Temperature	-40°C to 85°C		
Humidity	10% to 90%, non-condensing		
Vibration	MIL-STD-810H, Method 514.8, Category 4		
Shock	MIL-STD-810H, Method 516.8, Procedure I		
EMC	CE/ FCC Class A, according to EN 55032 & EN 55035 EN 50121-3 (EN 50155:2017, Clause 13.4.8) (NRU-172S-PPC only)		
^[1] The required DC input range is 8V to 35V when the system load is under 60W. The required DC input range is 12V to 35V when the system load is between 60W to 96W. The required DC input range is 20V to 35V when the system load is between 96W to 160W.			
^[2] For sub-zero and over 60°C operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.			
All rights reserved. Copyright© 2024 Neosys Technology Inc.			

Last updated: 1 - Nov 2024


NRU-170-PPC Series



Appearance

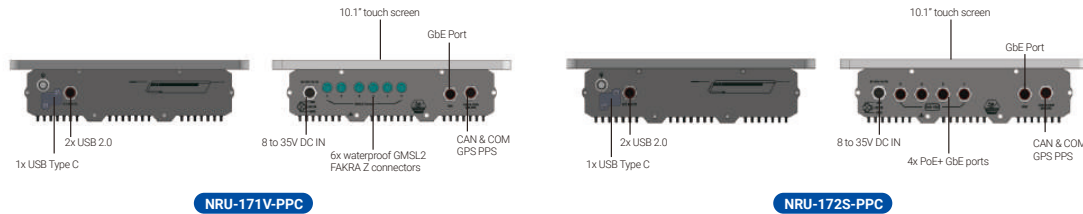

Dimensions

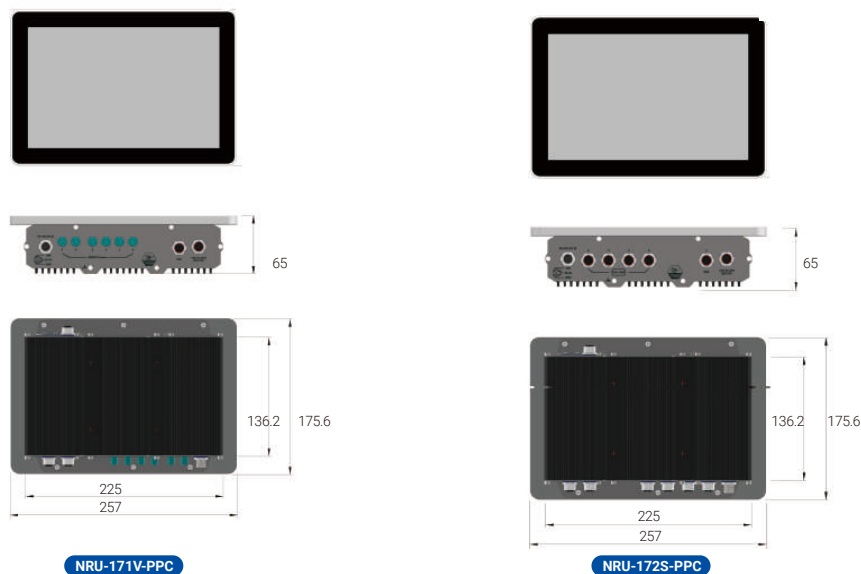

Ordering Information





Model No.	Product Description
NRU-171V-PPC	10.1" AI Panel PC Powered by Jetson Orin™ NX/ Nano with 6x GMSL2 Ports
NRU-172S-PPC	10.1" AI Panel PC Powered by Jetson Orin™ NX/ Nano with 4x PoE+ GbE Ports
Jetson Module Option	Options for Different Jetson Orin™ NX and Jetson Orin™ Nano SKUs
NVMe Option	Options for Different Capacities of M.2 2242 NVMe Storage

Optional Accessories

PA-60W-OW	60W AC/ DC power adapter 12V/ 5A; cord end terminals for terminal block, operating temperature: -30 to 60°C
PA-160W-OW	160W AC/ DC power adapter 20V/ 8A; 18AWG/ 120cm; cord end terminals for terminal block, operating temperature: -30 to 70°C
AC-ISX031-H60	Sony ISX031 CMOS sensor w/ built-in ISP; 1920x1536 @30fps; HFOV H63.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-ISX031-H120	Sony ISX031 CMOS sensor w/ built-in ISP; 1920x1536 @30fps; HFOV H120.6°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-ISX031-H190	Sony ISX031 CMOS sensor w/ built-in ISP; 1920x1536 @30fps; HFOV H195.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX390-H60	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 63.9°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX390-H120	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 120.6°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX390-H190	Sony IMX390 CMOS sensor camera; 1920x1080 @ 30fps; LFM; HFOV 186°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX490-H30	Sony IMX490 CMOS sensor camera; 2880x1860 @30fps; LFM; HFOV 30.0°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX490-H60	Sony IMX490 CMOS sensor camera; 2880x1860 @30fps; LFM; HFOV 62.5°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap
AC-IMX490-H120	Sony IMX490 CMOS sensor camera; 2880x1860 @30fps; LFM; HFOV 120°; IP67+IP69K; -40°C to 85°C operating temperature; male FAKRA connector; active alignment; without lens cap

All specifications and photos are subject to change without prior notice

NRU-170-PPC Series

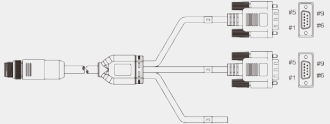Type	Model Name	Description
	Cbl-FAKRA-ZFM-ZFM-12M	Waterproof FAKRA Z-code Female to Waterproof FAKRA Z-code Female, Length: 12M
	Cbl-M12X8M-RJ45F-100CM	Waterproof M12 (8-pole-X-coded) to RJ45 Female, CAT6A, Length: 100CM
	Cbl-M12A8M-2U2TA-180CM1	Waterproof M12 (8-pole-A-coded) to 2x USB 2.0 type A (female), Length: 180CM
	Cbl-M12A8M-2DB9M_OW2-180CM1	M12 A-Code Male 8P to x2 DB9 Male+2P, Length: 180CM

Cable Kit

NRU-170-PPC Series cable kit		
Cblkit-NRU-171V-PPC	6xCbl-FAKRA-ZFM-ZFM-12M	1xCbl-M12X8M-RJ45F-100CM
	1xCbl-M12A8M-2U2TA-180CM1	1xCbl-M12A8M-2DB9M_OW2-180CM1
Cblkit-NRU-172S-PPC	5xCbl-M12X8M-RJ45F-100CM	1xCbl-M12A8M-2U2TA-180CM1
	1xCbl-M12A8M-2DB9M_OW2-180CM1	

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660