


ER58000 Series

Hardened Managed 8-port 10/100BASE M12 PoE with 2-port Gigabit M12 Ethernet Switch



Overview

EtherWAN's ER58000 Series provides a hardened 10-port switching platform supporting IEEE802.3at Power over Ethernet, high performance switching with robust management features required for railway transportation application.

The ER58000 Series is equipped with 8 x 10/100BASE-TX PoE with M12 connector, in combination with two Gigabit M12 ports. Compliant with EN50155 standard, the ER58000 Series is designed for rolling stock applications.

The IEEE802.3at PoE ports provide up to 30W/port with a total power budget of 120W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements such as; outdoor PTZ dome cameras, wireless access points, and way-side communication devices.

Wall mountable, the ER58000 Series is equipped with EtherWAN's Alpha-Ring self-healing ring technology providing less than 15ms fault recovery time. Users are able to access management features such as port security, IGMP snooping, port-based VLAN, GARP protocols, link aggregation, via web browser, telnet, SSH, SNMP, RMON, TFTP, and RS-232 console interfaces. With the hardened specifications, the ER58000 Series is designed to operate at -40°C to 75°C in harsh environments, where high ESD, shock, and vibration may be present.

EtherWAN — "When Connectivity is Crucial."

Spotlight

- **Railway Oriented**
 - Compliant with EN50155/EN50121-3-2/EN50121-4 railway applications
- **M12 Connectors**
 - Built-in 8-port 10/100BASE M12 plus 2-port Gigabit M12/LC connectors
- **Power over Ethernet (PoE)**
 - Provides 8-port PoE function with IEEE802.3at up to 30W per port

Software Features

Management

- Interface
 - CLI, Telnet and Web Browser
 - SNMP v1/v2c/v3
- Firmware and configuration upgrade and backup via TFTP
- Supports DHCP Server/Client
- RMON (Remote monitoring): group 1, 2, 3, 9
- Port mirroring: TX/RX and both
- NTP (Network Time Protocol) time synchronization
- IEEE802.1ab LLDP (Link Layer Discovery Protocol)

Security

- MAC address filtering
- Enable/disable port
- Storm control (broadcast and multicast types)
- IEEE802.1x LAN access control
- Remote authentication through RADIUS
- SSH for CLI and Telnet security
- SSL for web security
- Multi-level user account/password against unauthorized configuration

Quality of Service (QoS)

- Priority Queues: 4 queues per port
- Traffic classification based on IEEE802.1p CoS, DSCP, WRR (Weighted round robin) and strict mode
- Rate Limiting (Ingress/Egress)

Layer 2 Features

- Auto-negotiation for port speed and duplex mode
- Flow Control
 - IEEE802.3x full duplex mode
 - Back-Pressure half duplex mode
- Redundant Protocol
 - IEEE802.1D Spanning Tree Protocol (STP)
 - IEEE802.1w Rapid Spanning Tree Protocol (RSTP)
 - IEEE802.1s Multiple Spanning Tree Protocol (MSTP)
 - EtherWAN's α -Ring network fault recovery (<15ms) and α -Chain
- VLANs
 - Port-based VLANs
 - IEEE802.1Q Tag VLANs (128 groups, 4096 VID)
 - GVRP (GARP VLAN Registration Protocol)
 - GMRP (GARP Multicast Registration Protocol)
- Link Aggregation
 - Static Trunk (2 groups, support MAC base)
 - IEEE802.3ad Link Aggregation Control Protocol
- IGMP Snooping
 - IGMP snooping v1/v2/v3

Performance

- Switching Capability: 5.6 Gbps
- Packet Buffer Size: 2M bits
- MAC Address Table: 8K

Hardware Specifications

Technology

Standards

- IEEE802.3 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3ab 1000BASE-T
- IEEE802.3z 1000BASE-SX/1000BASE-LX
- IEEE802.3x Full duplex and flow control
- IEEE802.1p QoS
- IEEE802.1Q Tag VLANs
- IEEE802.1w RSTP
- IEEE802.1x Port-based Network Access Control
- IEEE802.1s MSTP
- IEEE802.3ad LACP
- IEEE802.3af/at Power over Ethernet (PoE)

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

Packet Buffer Memory

- 2M bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 8192 MAC addresses

Power

Input

- Redundant power inputs:
M23: 24 - 48VDC

Power Consumption

- Device: Max. 11W (without PoE)
- PoE power budget (depends on power input): 120W Max.

PoE Power Output

- Port 1 to 8: IEEE802.3at, up to 30W/port

Protection

- Overload current protection

Mechanical

Casing

- Metal Case
- IP50

Dimensions

- 288mm (W) x 161.5mm (D) x 64mm (H)
(11.3" (W) x 6.4" (D) x 2.5" (H))

Weight

- 2.3Kg (5.07lbs)

Installation

- Wall mounting

Interface

Ethernet Port

- 10/100BASE-M12 D-Code 4-pin Female: 8 ports
- Gigabit-M12 A-Code 8-pin Female/LC: 2 ports

Console Port

- One M12 port

LED Indicators

- Per Unit: Power 1 (Green)
Power 2 (Green)
- Per Port: Link/Activity (Green)

Alarm Contact

- One relay M12 A-Code 4-Pin Female output with current
1A @ 250 VAC

Environment

Operating Temperature

- -40°C to 75°C (-40°F to 167°F)
Tested @ -40°C to 85°C (-40°F to 185°F)

Storage Temperature

- -45°C to 85°C (-49°F to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility

EMI

FCC Part 15B, Class A

EN61000-6-4

EN55022

EN55011 (for EN50155)

EMS

EN61000-6-2

- EN61000-4-2 (ESD Standards)
- EN61000-4-3 (RFI Standards)
- EN61000-4-4 (Burst Standards)
- EN61000-4-5 (Surge Standards)
- EN61000-4-6 (Induced RFI Standards)
- EN61000-4-8 (Magnetic Field Standards)
- EN61000-4-9 (Pulsed magnetic field)

Environmental Test Compliance

IEC61373 (Vibration) for EN50155

IEC61373 (Shock) for EN50155

IEC600680-2-32 Ed (Free fall)


Industrial Compliance

EN50155


EN50121-3-2

EN50121-4

Application Diagram

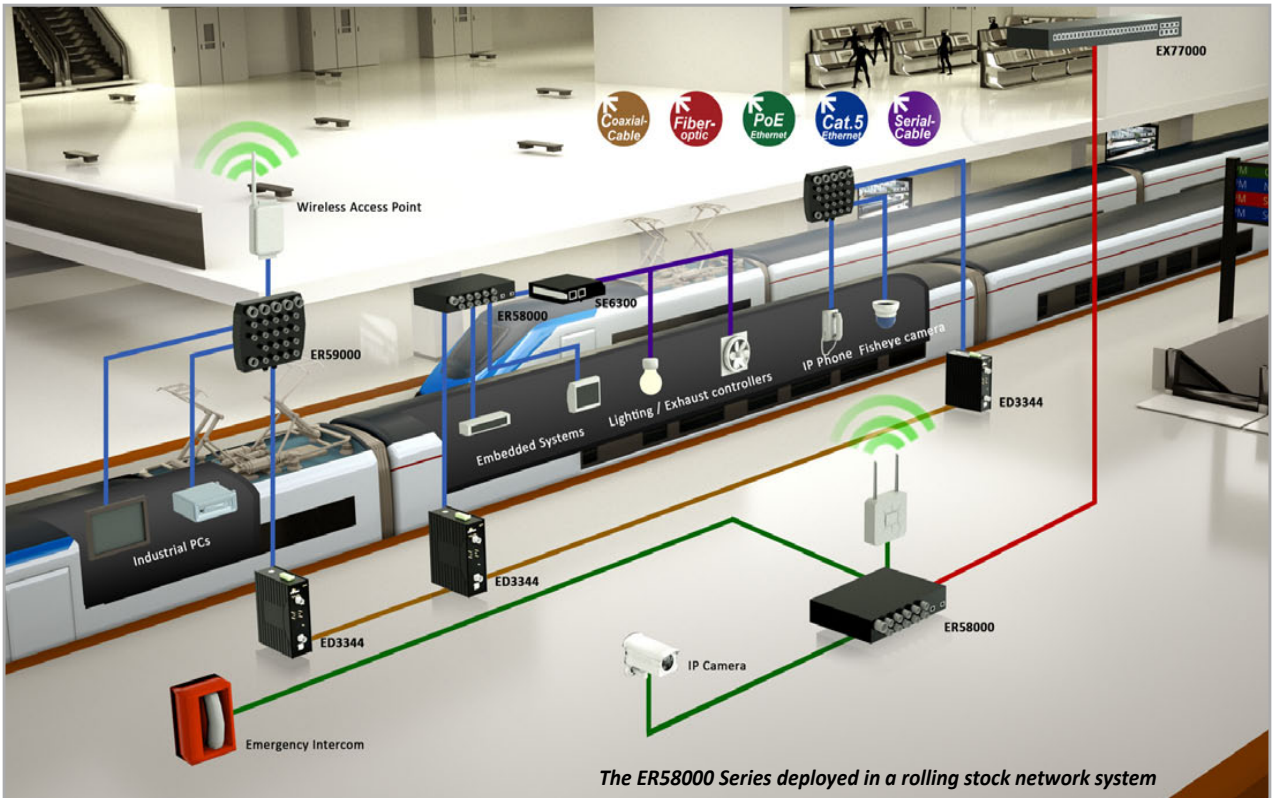

Dimensions

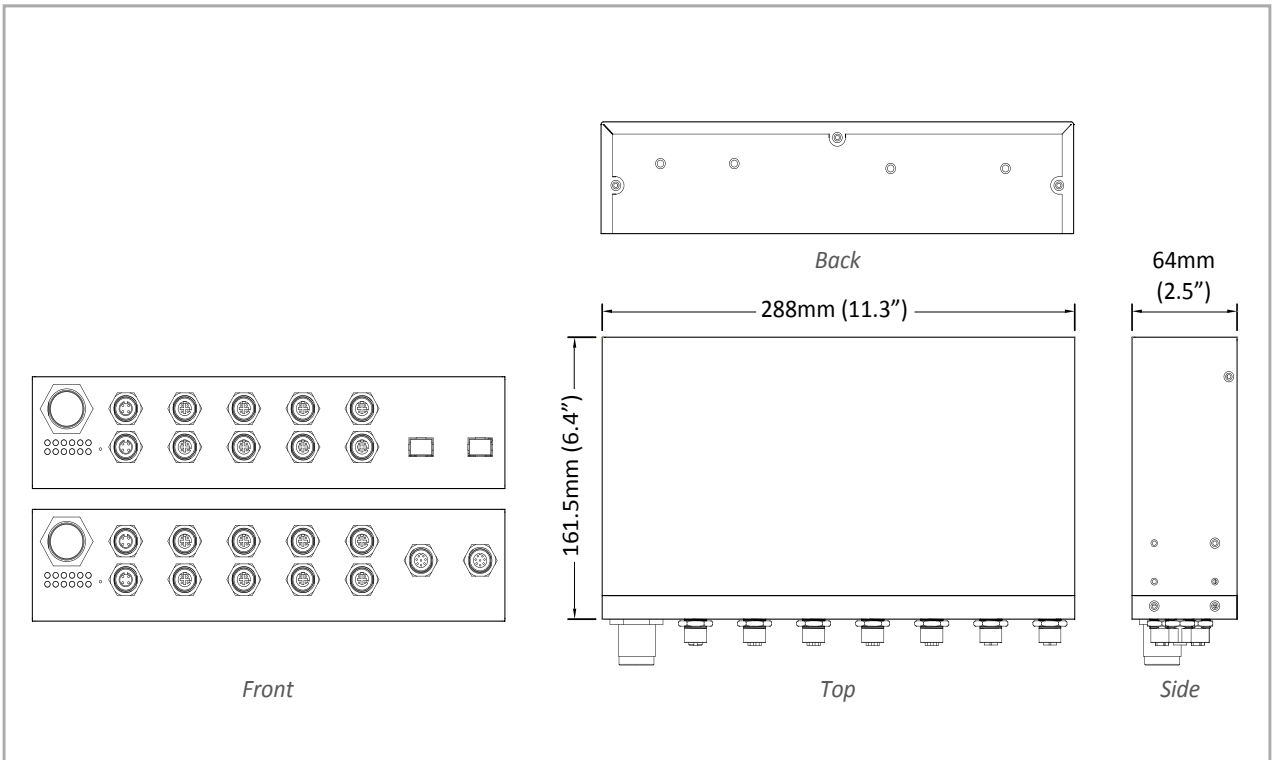

Ordering Information

Model

| | |
|----------------------|---|
| ER58802-20YHT | 8-port 10/100BASE-M12 PoE + 2-port Gigabit Hardened Managed Ethernet Switch |
|----------------------|---|

* Panel mounting kit included

Gigabit Port Options (Y)

| | |
|----------|-------------------------|
| 1 | 10/100/1000BASE-TX |
| E | 1000BASE-SX (LC) - 550m |
| M | 1000BASE-SX (LC) - 10Km |
| N | 1000BASE-LX (LC) - 20Km |

* More Gigabit options also available upon request

Optional Accessories

| | | |
|-----------------------|---|---|
| 96G-S1N8A80WW |  | M23 Power Connector |
| 96G-1618957XX |  | Power cable with 6-pin female M23 connector, 2-meter cable |
| ER58000-RJ454P |  | 4-pin M12 D-code male to 10/100BASE-TX RJ45 interface, 3-meter cable |
| ER58000-RJ458P |  | 8-pin M12 A-code male to 10/100/1000BASE-TX RJ45 interface, 3-meter cable |

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660