

Giada i39B

Bay Trail Celeron Signage Player



Features


- ◆ Intel® Celeron J1900 Processors
- ◆ 1 x SO-DIMM DDR3L, Up to 8GB
- ◆ Two Independent Displays VGA+HDMI
- ◆ 1 x 2.5" SATA, 1 x mSATA
- ◆ 1 x USB3.0, 4 x USB2.0, 1 x RS232
- ◆ 1 x RJ45, 1 x Mini-PCle for WiFi/BT

Specifications


RoHS

i39B-BJ000-V2		
Processor	CPU	Intel® Celeron J1900
	Frequency	2.00 GHz (Up to 2.42 GHz)
	BIOS	AMI Source Code
	Chipset	SOC
Memory	Type	DDR3L-1333MHz
	Socket	1 x SO-DIMM
	Max Size	8 GB
Graphics	GPU	Intel® HD Graphics
	Graphic Engine	DirectX 11.1, OpenGL 3.0, OpenCL 1.2
	HDMI	1 x HDMI (Max. 1920 x 1080 @60Hz)
	VGA	1 x VGA (Max. 2560 x 1600 @60Hz)
Network	Controller	Realtek RTL8111F Gigabit Ethernet
	Interface	1 x RJ45
I/O	USB	1 x USB 3.0, 4 x USB 2.0
	Display Interface	1 x HDMI, 1 x VGA
	LAN	1 x RJ45
	Serial Port	1 x RS232
	Audio	1 x MIC-IN, 1 x AUDIO-OUT & SPDIF
	Mini-PCle#1	1 x Full-size Mini-PCle for mSATA
	Mini-PCle#2	1 x Half-size Mini-PCle for WiFi/BT
	JAHC Switch	1
	LED Indicators	1 x HDD LED, 1 x Power LED
Storage	SATA	1 x 2.5" SATA
	mSATA	1 x Full-size mSATA
	Card Reader	1 x TF Card Reader
JAHC Tech	WatchDog Timer	0~255 Second Time Out Support
	Auto Power On	Power Activated Automatically Start
	RTC	Set Up Independently Every day, A Week as a Cycle
	Remote Control	By IR Controller for Power On
Operation System	Windows	Windows 7/8.1/10
	Linux	Supported


I39B-BJ000-V2		
Power	Power Type	DC-IN
	Power Adapter	19V/2.1A
Mechanical	Dimensions (W x D x H)	190mm x 149mm x 26mm
	Fanless	No
	Construction	Metal
	Mounting	Desk/Wall Mounting and VESA Mounting Kit (Optional)
	Color	Black
Environment	Operating Temperature	0°C ~ 40°C (32 °F ~ 104 °F) at 0.7m/s Air Flow
	Relative Humidity	95% @ 40°C (non-condensing)
Certification	Certification	CE, FCC Class B, CCC

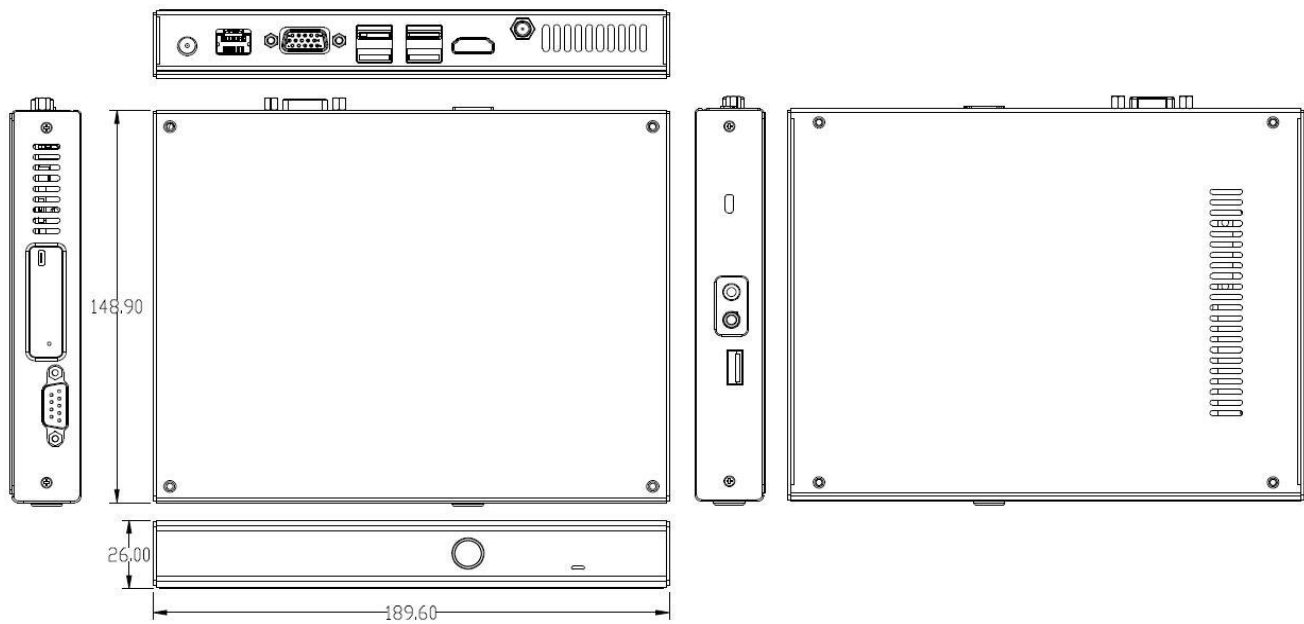


Front Panel
External I/O




Left Panel
External I/O



Rear Panel
External I/O



Right Panel
External I/O



Order Information

Part Number	Intel CPU	RAM	VGA	HDMI	GbE	RS232	USB	SATA	mSATA	Operating Temperature
I39B-BJ000-V2	J1900	Up to 8 GB	1	1	1	1	1 x USB3.0 4 x USB2.0	1	1	0 ~ 40°C

Packing List

Part Number	Description	Part Number	Description
-	1 x i39B	-	1 x Drive Disk
-	1 x User Manual	-	1 x AC Power Adapter
-	1 x AC Power Cable	-	1 x WiFi Antenna

The product appearance, specifications and features are subject to change. Giada reserves the right of final interpretation for the content hereinabove.

versions: V1.0

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660