

VIKING-912BP

12.1" 8th Gen. Intel Core i3/i5 Marine Panel PC

Industrial Panel PC

HMI Controller

Industrial
Display Monitor

Box PC




Features

- 12.1" Marine Panel PC
- 8th Gen. Intel Core i3/i5 Processors
- 1 x 260pin SO-DIMM, up to 32G DDR4 2400MHz
- True Flat Bezel Design
- IP66 Front Panel
- Aluminum Enclosure (with Anti-Corrosion Coating)
- DC 24V Power Input with Isolated
- IEC 60945 Marine Certification

Specifications

System	
CPU	Intel Core i3-8145UE (2C/4T, 2.2GHz, 15W TDP) Intel Core i5-8365UE (4C/8T, 1.6GHz, 15W TDP)
System Chipset	SoC
Memory	1 x 260pin SO-DIMM, up to 32G DDR4 2400MHz
TPM	TPM 2.0
IO Port	
USB	4 x USB 3.0 type A
Serial/Parallel	1 x RS-232 (COM1, 5-pin terminal block)
	1 x RS-232/422/485 Selectable Default RS-485 (COM 2, 5-pin terminal block)
	1 x Display Port
	1 x Line-out, Phone Jack
	1 x ESD Ground
LAN	2 x GbE RJ-45
Power Connector	1 x 2-pin Terminal Block Connector (for remote power switch) 1 x 3-pin Terminal Block Connector
Front Side I/O	Keypad Capacitive Touch with LED
	- Power
	- Brightness+
	- Brightness-
	- Brightness Mode Swap (DAY, DUSK, NIGHT)
	1 x Buzzer
Storage Space	
Storage	Default: 1 x M.2 M-Key 2242(option 2280 can't use TB-528 at same time) 1 x 2.5" HDD space (option)
Expansion	
On board expansion bus	1 x TB-528 Expansion Connector (for 19"/24" only) option TB-528C2I for Isolation 2 x RS-422/485 Isolation
Display	
Display Type	12.1" TFT-LCD
Max. Resolution	1024 x 768
Max. Color	16.7M
Luminance (cd/m ²)	500
View Angle (H/V)	178(H)/178(V)
Contrast	1000:1
Backlight Lifetime	30,000 hrs
Touch Screen	
Type	Projected Capacitive Touch
Interface	USB
Light Transmission(%)	90%

Dimensions

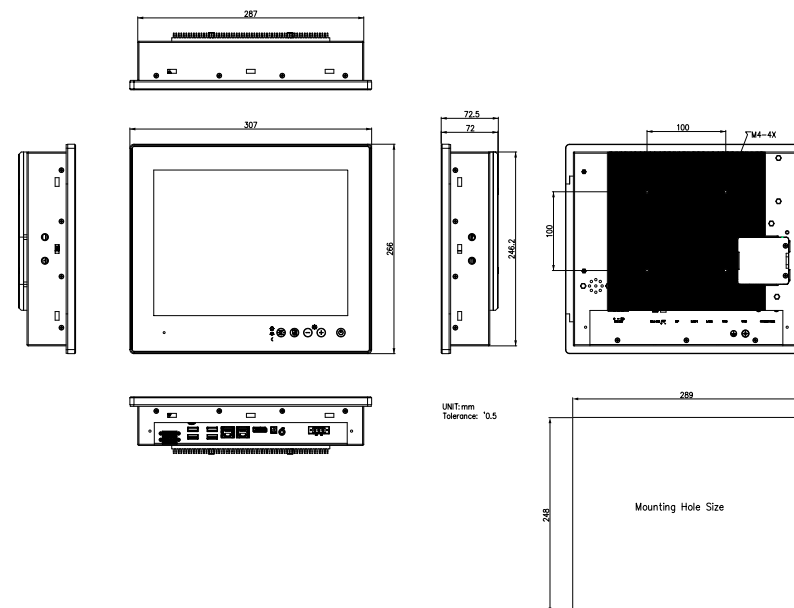

Power	
Power Input	DC 24V with Isolated / AC Power option
Power Consumption	VIKING-912BPH : 50.88W (Max)
Mechanical	
Construction	Black/ Aluminum Bezel and Aluminum Housing (Anti-Corrosion Coating)
Mounting	Panel Mount/ VESA Mount Front Access Mount / Mounting Bracket (option)
Dimensions	307 x 266 x 72.5 mm
Net Weight	3.6 kg
Environmental	
Operating Temperature	0~50°C (WT1: -20~60°C for optional)
Storage Temperature	-30~70°C
Humidity	10 to 90% @ 40°C, non-condensing
IP Rating	Front Panel IP66
Certificate	CE/FCC/IEC 60945
Operating System Support	
Windows 10, Windows 11	

Industrial Panel PC

All specifications and photos are subject to change without notice.

All specifications and photos are subject to change without notice.

Industrial Panel PC

V 1.1

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660