

ITA-460E

Water-resistant Fanless In-vehicle Computer with Intel® 8th/9th Gen Core™ i CPU



Features


- Intel® 8th/9th Gen Core™ i CPU (LGA1151)
- 8GB memory on board, 1 x SO-DIMM
- Supports 2 x Gigabit Ethernet, 2 x USB3.0/3.1
- Supports 2 x COM (RS232/422/485)
- Supports 1 x mSATA, 2 x 2.5" HDD/SSD
- Supports 3 x mini PCIe expansion sockets for integrating Wi-Fi, LTE, and GPS wireless communication modules through reserved 6 SMA connectors
- Supports 12/24V_{DC} vehicle power
- All-around IP65 rating for protection from water and dust ingress
- Wide operating temperature (-25 ~ 60 °C / -13 ~ 140 °F)
- No RED Certificate




Specifications

8th/9th Generation Processor (TDP 35W)	CPU	i7-9700TE	i5-9500TE	i3-9100TE	i7-8700T	i5-8500T			
	Core/Thread Number	8/8	6/6	4/4	6/12	6/6			
	Base Frequency	1.8GHz	2.2GHz	2.2GHz	2.4 GHz	2.1 GHz			
	Max Turbo Frequency	3.8GHz	3.6GHz	3.2GHz	4.0 GHz	3.5 GHz			
	L3 Cache	12MB	9MB	6MB	12MB	9MB			
	Chipset	H310							
8th/9th Generation Processor (TDP 65W)	BIOS	AMI 256Mb SPI Flash							
	CPU	i7-9700E	i5-9500E	i3-9100E	i7-8700	i5-8500	i3-8100	G5400	G4900
	Core/Thread Number	8/8	6/6	4/4	6/12	6/6	4/4	2/4	2/2
	Base Frequency	2.6GHz	3.0GHz	3.1GHz	3.2GHz	3.0GHz	3.6GHz	3.7GHz	2.9GHz
	Max Turbo Frequency	4.4GHz	4.2GHz	3.7GHz	4.6GHz	4.6GHz	4.1GHz		
	L3 Cache	12MB	8MB	6MB	12MB	9MB	6MB	4MB	2MB
	Chipset	H310							
	Temperature	-10 ~ 40 °C (with Industrial SSD, 0.7 m/s air flow)							
	BIOS	AMI 256Mb SPI Flash							
	Technology	Dual-channel DDR4 2400 MHz (without ECC)							
Memory	Solder-down	8GB on board (optional 16GB on board)							
	Socket	1 x 260-pin DDR4 SO-DIMM (up to 16GB per socket)							
	Maximum Capacity	16GB (optional 32GB)							
	Chipset	H310: Intel® HD Graphics 610, supports DirectX 12							
Display	HDMI	1X HDMI (HDMI1.4b: up to 4096 x 2160@30Hz)							
	Controller	Intel® i210T							
Ethernet	Interface	2 x Gigabit Ethernet with M12 X-Coded							
	SATA	2 x maximum 9 mm 2.5" HDD/SSD							
Storage	mSATA	1 x mSATA slot on board							
	USB	2 x USB3.0/3.1							
I/O	Serial Port	DB9 x 1 (2 x RS-232/422/485 support sw programmable)							
	Audio	M12 A-Coded x 1 (1 x line out and 1 x mic in)							
	Mini PCIe	H310: 3 x mini PCIe (PCIe Gen3 x 1, USB 2.0 with 1 SIM slot)							
LED	LED	4 (1 x power, 1 x storage, and 2 x LAN)							
Power	Type	AT/ATX							
	Input Voltage	8 ~ 32 V _{DC} (9.6 ~ 28.8V _{DC} full loading)							
	Power consumption	Typical: 33W, maximum: 95W							
Watchdog Timer	Output	System reset							
	Interval	Programmable 1 ~ 255 sec/min							
Environment	Operating Temperature	35W CPU w/ industrial SSD -25 ~ 60 °C / -13 ~ 140 °F with 0.7 m/s air flow							
	Storage Temperature	-40 ~ 85 °C							
	Humidity	95% @ 40 °C (non-condensing)							
	Vibration	MIL-STD-810G, IEC 60721-3-5 Class 5M3 (Maximum: 5G, 8 hours, per axis)							
	Shock	MIL-STD-810G (75G 11 ms), IEC-60721-3-5 Class 5M3 (Opreating: 100G 6ms)							
Mechanical	Dimensions (W x H x D)	195.8 x 124.2 x 226.9 mm (7.71" x 4.89" x 8.93")							
	Weight	6.3KG/13.89lbs							
	Installation	Desktop/wall mount							
	IP	IP65 protection from water and dust ingress (IP-67 optional)							
Certifications	EMC	CE/FCC Class B, BSMI							
	Safety	CB/UL 62368, CCC, Emark, ISO 7637-2, BSMI							
OS Support	Windows 10, Linux Ubuntu 20.04 (Canonical Ubuntu certified and provide the Ubuntu support for 5 years)								

ITA-460E

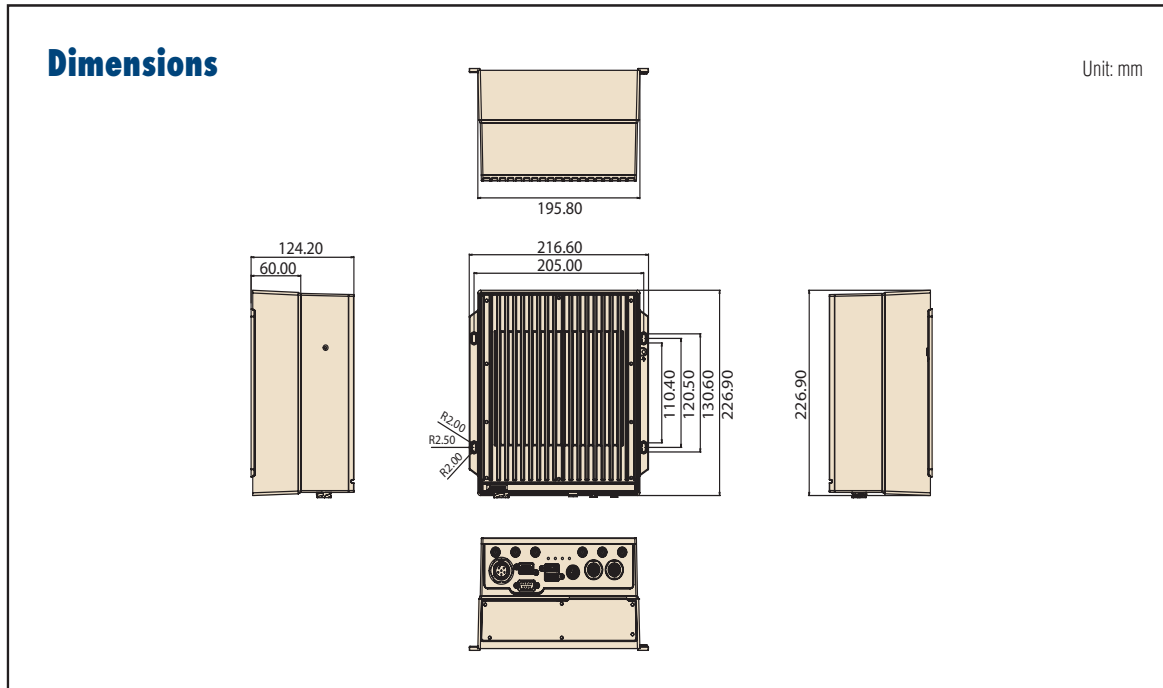

Front View

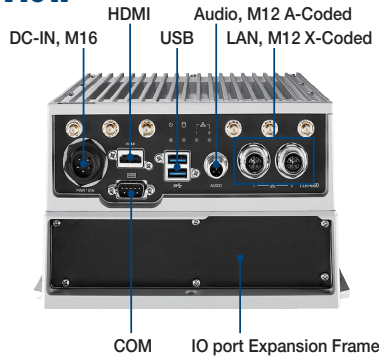

Ordering Information

Part Number	Description	HDMI	2.5" SSD slot	mSATA slot	USB3.0/3.1	LAN	COM	miniPCIe slot	Power
ITA-460E-LOA1	ITA-460E, 8G onboard memory, barebone unit	1	2	1	2	2	2 (By Y cable)	3	8 ~ 32V _{DC}

Accessory Box List

Accessory	Description
Power cable	M16 6P (female) to 6P twisting and tinning stranded wires, 15cm
COM cable	D-SUB 9P (female) to 2 x D-SUB 9P (male), 15cm
SSD kit	SSD bracket and 2 x SATA cable
miniPCIe kit	Inner heatsink bracket, miniPCIe bracket
Thermal pad	Pads for SO-DIMM memory, mSATA, miniPCIe

Optional Accessories

Part Number	Product Description
96PSA-A150W19P4-4	ADP A/D 100-240V 150W 19V C14 TERMINAL BLOCK 4P
1702002600	Power cord (USA) UL/CSA, 3-pin, 10A, 125V, 1.83 M, 180 D
1702002605	Power cord (EU), 3-pin, 10A, 250V 1.83M, 90D
1700000596-11	Power cord (CCC), 3-pin, 10A, 250V, 1.83 M, 180D
FRU-ITALAN-0003	External LAN cable (M12 X-Coded to RJ45)
FRU-ITAAUD-0002	External audio cable (M12 A-Coded to 2 x Audio Jack)

Optional Expansion Bracket

Part Number	Product Description
1960106077N011	4-DB9 Panel for ITA-460G Powder 432C
1960106077N001	2-HDMI+2-DB9 Panel for ITA-460G Powder 432C
1960106077N031	6-M12 Panel for ITA-460G Powder 432C
196011245N001	2-DB9 Cover for ITA-460G Powder 432C

For sales inquiries or further information, please contact us at Rail@Advantech.com.tw

Online Download www.advantech.com/products

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660