


IBOX-BYT1 D TYPE

Fanless Box system with Intel® Atom™/ Celeron®
(Bay Trail) Processor



Key Features


- Intel® Atom™/ Celeron® (Bay Trail SoC) onboard processor
- Dual display: VGA/HDMI
- 1 VGA, 1 HDMI, 4 USB, 3 COM, 2 LAN, 1 AUDIO, 1 DIO
- DC 12 ~ 24V input
- Wide temperature: 0°C ~ 60°C
- Watchdog timer

Entry Box PC

Product Specification

System color	Silver
Mechanical	Aluminum extrusion and heavy-duty steel
CPU	Intel® Bay Trail SoC onboard; Intel® Celeron® J1900 2.0GHz quad core SoC(10W) Intel® Atom™ E3845 1.91GHz quad core SoC(10W) Intel® Atom™ E3825 1.33GHz dual core SoC (6W)
Chipset	Intel® Celeron® J1000/Atom™ E3000 series SoC
Graphic	Intel® HD Gen. 7 graphics
BIOS	AMI SPI Flash ROM
System memory	1 x 204-pin DDR3L 1067/1333MHz SDRAM; max. up to 8GB
System I/O	1x HDMI, 1 xVGA, 3 x COM(2 x RS232, 1 x RS232/ 422/485, RS485 with auto flow control), 2 x USB 3.0, 2 x USB 2.0, 2 x LAN, 1 x Audio , 1 x DIO , 1 x Power SW
Ethernet	2 x Gigabit Ethernet (Intel® I210)
Storage support	1 x 2.5" HDD , 1 x mSATA
Audio	Mic-in, Line-in, Line-out
Expansion slot	1 x Mini-PCIe (Half size) 1 x Mini-PCIe (Full size, share with mSATA)
System indicators	1 x Power LED
System controls	1 x Power on switch
Digital I/O	4 in / 4 out
Watchdog timer	Interval: Programmable 1 ~ 255 sec. Output: System reset
OS Support	Win7, Win8.1, Win10, Linux
Power supply	Wide range DC 12 ~ 24V input, phoenix connector
Operating temperature	0°C ~ 60°C (Optional -20°C ~ -40°C)
Storage temperature	-20°C ~ 80°C
Relative humidity	0% ~ 90% (non-condensing)
Mounting	Wall mount/VESA100 mount
Dimensions	261 mm(W) x 146 mm(D) x 40.5 mm(H)
Weight	1.77 kg

Dimensions

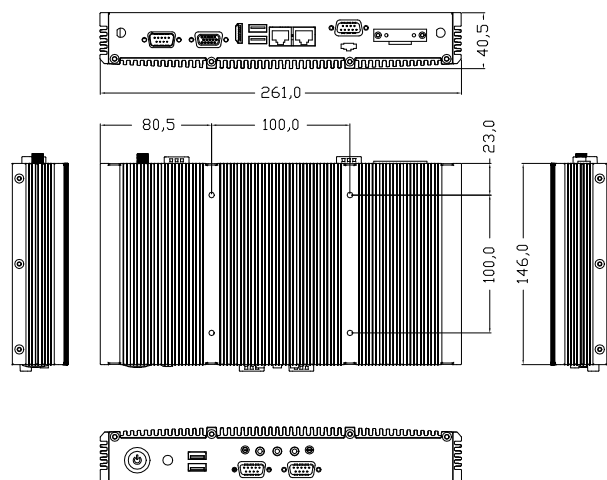


Optional

Power cord	US (VN00000100CU) / EUR (VN00000200CU) / JP (VN00000300CU) / UK (VK00028600CU)
Power Adapter	90~264VAC.60W ADAPTER (VL22002000AH)

Ordering Information

Part Number	description
IBOX-BYT1-1900-DN00-0000	Standard Type D Fanless BOX PC, Intel Celeron J1900 10W, HDMI/VGA, 3COM/4USB/2LAN/1Audio/1DIO, BAREBONE, DC(12V~24V)/Phoenix Connector
IBOX-BYT1-3825-DN00-0000	Standard Type D Fanless BOX PC, Intel Atom E3825 6W, HDMI/VGA, 3COM/4USB/2LAN/1Audio/1DIO, BAREBONE, DC(12V~24V)/Phoenix Connector
IBOX-BYT1-3845-DN00-0000	Standard Type D Fanless BOX PC, Intel Atom E3845 10W, HDMI/VGA, 3COM/4USB/2LAN/1Audio/1DIO, BAREBONE, DC(12V~24V)/Phoenix Connector

Rear I/O

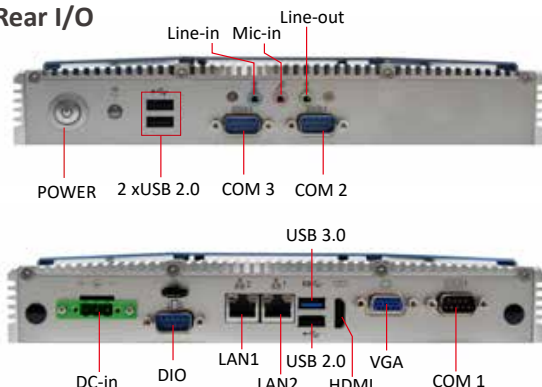

*All specifications and photos are subject to change without prior notice

60

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660