

DFI-ACP

○ Revision Control ○ Long Life Cycle



EL620-C Intel® G41 ATX Board

PROCESSOR

- LGA 775 socket supports:
 - Intel® Core™2 Duo E8400/E7400/E6400/E4300
 - Intel® Pentium® E6500/E5300/E2160
 - Intel® Celeron® E3400/E1500/440
- Intel Enhanced Memory 64 Technology (EM64T)
- Enhanced Intel SpeedStep Technology (EIST)
- 1333/1066/800MHz FSB

CHIPSET

- Intel® chipset
 - Intel® G41 Express chipset
 - Intel® ICH7 I/O Controller Hub

SYSTEM MEMORY

- Two 240-pin DDR3 DIMM sockets
- Supports DDR3 800/1066MHz DIMM
- Maximum memory bandwidth of 17GB/s in dual-channel mode when using DDR3 1066MHz
- Supports dual channel memory interface
- Supports up to 4GB system memory
- Supports unbuffered x8 and x16 DIMMs

EXPANSION SLOTS

- 5 PCI slots (PCI 12.3)
- 3 ISA slots

Note: 1 PCI and 1 ISA are shared slots.

ONBOARD GRAPHICS FEATURES

- Integrated Intel GMA X4500
 - 3D, 2D and video capabilities, DX10 and OpenGL 2.1
- Display ports: DVI (Chrontel CH7307C) and VGA

ONBOARD AUDIO FEATURES

- Realtek ALC262 2-channel High Definition Audio
- High performance DACs with 100dB SNR
- ADCs with 90dB SNR
- Two stereo DACs support 24-bit PCM format for stereo audio playback
- Three stereo ADCs support 20-bit PCM format for multiple input streaming
- SPDIF audio interface

ONBOARD LAN FEATURES

- 2 Realtek RTL8111DL PCI Express Gigabit Ethernet controllers
- 10Mbps, 100Mbps and 1Gbps data transmission
- IEEE 802.3u (10/100Mbps) and IEEE 802.3ab (1Gbps) compliant

SERIAL ATA (SATA) INTERFACE

- 4 Serial ATA ports compliant with SATA 1.0a specification
- SATA speed up to 3Gb/s (SATA 2.0)

IDE

- Supports up to two IDE devices
- Ultra ATA 100/66/33

SUPER I/O

- Winbond W83627DHG-P: supports 8-bit Digital I/O and printer port
- Fintek F81217U: supports COM1 to COM4
- Fintek F81217U: supports COM5 to COM8

ISA INTERFACE

- ITE IT8888G: PCI to ISA slot bridge
 - 3 ISA slots
- Does not support ISA Master devices and ISA DMA devices

REAR PANEL I/O PORTS

- 1 mini-DIN-6 PS/2 mouse port
- 1 mini-DIN-6 PS/2 keyboard port
- 2 DB-9 serial ports
 - Supports RS232/422/485
 - Pins 1 and 9 of RS232 functions as RS232 signal or power (selectable via jumper)
- 1 DB-15 VGA port
- 1 DVI port (DVI-D signal only)
- 2 RJ45 LAN ports
- 4 USB 2.0/1.1 ports
- Mic-in, line-in and line out jacks

I/O CONNECTORS

- 2 connectors for 4 external USB 2.0/1.1 ports
- 6 connectors for 6 external RS232 serial ports
- 1 8-bit Digital I/O connector
- 1 front audio connector for line-out and mic-in jacks
- 1 CD-in connector
- 1 SPDIF connector
- 4 Serial ATA connectors
- 1 40-pin IDE connector
- 1 25-pin parallel connector
- 1 24-pin ATX power connector
- 1 4-pin 12V power connector
- 1 chassis intrusion connector
- 1 front panel connector
- 3 fan connectors

BIOS

- AMI BIOS
- 8Mbit SPI BIOS

ENERGY EFFICIENT DESIGN

- ACPI v3.0b specification
- System Power Management
- Wake-On-Events include:
 - Wake-On-PS/2 KB/Mouse
 - Wake-On-USB KB/Mouse
 - Wake-On-LAN
- Microsoft®/Intel® APM 1.2 compliant
- AC power failure recovery

DAMAGE FREE INTELLIGENCE

- Monitors CPU/System/NB temperature and overheat alarm
- Monitors CPU/DIMM/NB/5V/12V/1.1V/VBAT voltages and failure alarm
- Monitors CPU/System/2nd fan speed and failure alarm
- Read back capability that displays temperature, voltage and fan speed
- Watchdog timer function

TEMPERATURE


- 0°C to 60°C

HUMIDITY

- 10% to 90%

PCB

- ATX form factor
- 305mm (12") x 244mm (9.6")

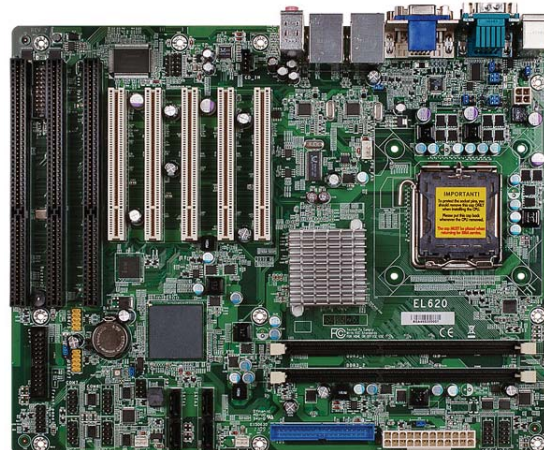

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660