

LPC-P101W-10

10.1" P-cap Panel PC with Celeron® N3160, IP65 Front Bezel and Wide Range Power Input



Features

- ▶ Celeron® N3160 Quad Core 1.6 GHz
- ▶ IP65 Front Bezel
- ▶ 10.1" P-cap Flat Bezel
- ▶ Fanless Design
- ▶ 3-Pin Power Input Terminal Block
- ▶ DC 9~36V Wide Range Power Input
- ▶ 1280*800 High Resolution LCD
- ▶ 500 nits LED Backlight
- ▶ 1000 nits LED Backlight (Optional)
- ▶ Optional Resistive Touch
- ▶ -20°C Cold Start



Specification

| System | |
|-------------------|---|
| Processor | Intel® Celeron® N3160 SoC CPU |
| System Memory | DDR3L SO-DIMM, up to 8 GB |
| External I/O Port | 4 x USB 3.0 2 x GbE LAN (RTL8111G) 1 x Display Port 1 x HDMI 3 x RS-232 1 x RS-232/422/485 1 x Audio 1 x Power press button 1 x 3-Pin Power Input |
| Storage | 1 x CFast 1 x mSATA (full size mini-PCIe) |
| Operating System | Windows 7 Pro, Windows Embedded Standard 7, Windows 8, Windows 10 |
| Expansion | 2 x MiniPCIe Slot |

| Power Requirement | |
|-------------------|---|
| Power Type | 3-Pin Power Input Terminal Block DC 9~36V Wide Range Power Input |

| Touch Screen | |
|--------------|-----------------|
| Type | 10.1" P-cap USB |


| LCD | |
|--------------------|---------------|
| Display Type | 10.1" TFT LCD |
| Max. Resolution | 1280*800 |
| Max. Color | 262K/16.2M |
| Luminance | 500 nits |
| View Angle | 85/85/85/85 |
| Backlight Lifetime | 30,000 hours |

| Mechanical | |
|--------------|--|
| Construction | Aluminum Front Bezel and Metal Case |
| IP Rating | Front Panel IP65 Front Panel IP66 Compliant |
| Mounting | VESA / Panel Mount |
| Dimension | TBC |

| Environment | |
|----------------|--|
| Operating Temp | -20~60 °C IEC-60068-2-1/2/14 |
| Storage Temp | -20~60 °C |
| Humidity | 10~90% @40 °C, non-condensing |
| EMC | FCC / CE Class A Certification CE Class B Compliant |
| Vibration | 1.5 Grms @10~500Hz, IEC-60068-2-64 |



Dimension & I/O Connector

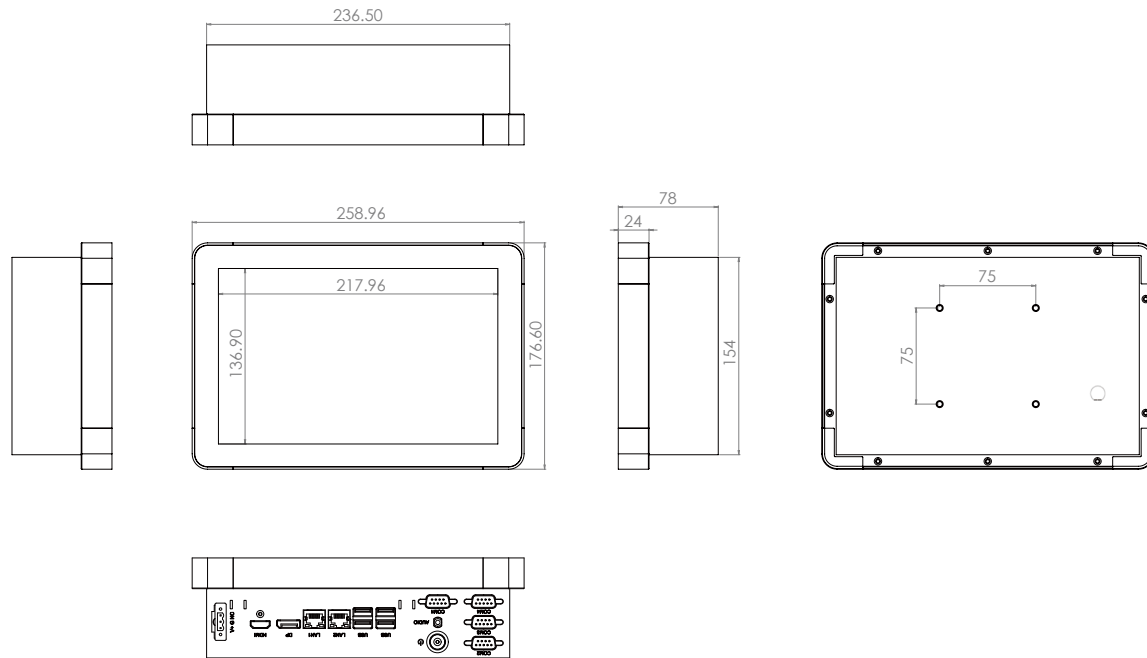

Ordering Information

| | |
|---------------------|---|
| LPC-P101W-10 | 10.1" P-cap Panel PC, Celeron® N3160, 1280 x 800 Reso, 500 nits, DC 9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A) |
| WFK-024 | WiFi kits w/ cable & Antenna (2.4GHz, 802.11 b/g/n, 1T1R) |
| WFK-524 | WiFi kits w/ cable & Antenna (2.4 & 5GHz, 802.11 a/b/g/n/ac + BT, 2T2R) |
| 07-001-PA90145-001A | 120 W / 24V power adapter with 3 pin terminal block (For High Brightness Model) |

Ordering Code

LPC-P101W-10 -H / -OB / -B / -AG / -AR / -9 / -V

H = High Brightness 1000 nits LED backlight

OB = Optical Bonding

B = Glass without touch

AG = Anti-Glare

AR = Anti-Reflection

9 = Power Board for Input on board fuse / Input reverse protection / Over current protection / Output short circuit protection

V = Vandal Proof Glass

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660