



DW SERIES

DW551DR4

55" Dual Side Digital Signage




3000 / 1000NITS
DUAL SIDED DESIGN



PORTRAIT &
LANDSCAPE



CEILING
SUSPENDED



FLOOR
MOUNTED



TRUECOLOR™
CALIBRATED

FOR MORE INFORMATION

For more information about DynaScan, visit our website at www.dynascandisplay.com. Copyright © DynaScan Technology Inc. All rights reserved. All specifications and descriptions are subject to change without notice. Reproduction without permission is prohibited.

DynaScan




65501 | V1.04

SPECIFICATION

MODEL	DW551DR4	
PANEL	LCD Panel Type	54.64 inches LCD (x2)
	Native Resolution	1920 x 1080
	Backlight	LED
	Default Color Temperature	D65 (6500 K)
	Brightness	1000 nits/ 3000 nits
	Color Depth	8 bits
	Contrast Ratio	3000:1
	Response Time (Typ.)	9 ms
	Viewing Angle (H/V)	178° / 178°
	Light Life Time (Typ.)	100,000 hrs
POWER	Panel Surface	AR, 2H
	Blackening Defect Free	Up to 110°C (230°F)
	Viewable With Polarized Lenses	Yes
	Power Supply	Internal
	Rated Voltage	100-240V ~ 50/60Hz
MECHANICAL SPECS	Power On Mode (Typ./ Max)	240 W / 380 W
	Power Saving Mode	< 1 W
	Bezel Width (T/B/L/R)	Even bezel 29.5 mm
MECHANICAL SPECS	Cabinet Color	Black
	Monitor Dimension (LxHxD, w/o stand)	1272.8 x 743.3 x 62.7 mm
	Monitor Weight	40 kg
	Orientation	Portrait/ Landscape
	Carring Handles	Yes
	Language	English
	Support SNMP (Up to V3.0)	Yes
	Dimming Control	Yes
	Proof of Image Retention	Yes
	Auto Orientation Sensor	Yes
USER INTERFACE	Ambient Light Sensor	Yes
	Power On/Off Scheduling	Yes
	Internal Temperature Sensor	Yes
	OSD Menu Rotation	Yes
	HDMI 1.4b (HDCP 1.4)	x2 (1080p)
INPUT	Display Port 1.2	x2
	DVI-D	x2
	Micro SD Slot	x2 (For Internal Player)
	USB 2.0	x2 (For Internal Player)
OUTPUT	Audio	x2
	RS-232	In x2
EXTERNAL CONTROL	RJ-45	x2 (LAN)
	Operating System	Android 7.1.2
INTERNAL PLAYER	Processor	ARM Quad-Core Cortex-A7
	Clock Speed	1.2 GHz
	Main Memory Interface	DDR3L-1066, 1GB
	Graphics	Mali-400MP2 GPU, Support OpenGL ES1.1/2.0
	Storage	Internal: Nand flash 8GB(multi sources) External: Support Micro SD, Up to 32GB
	Multimedia	VP8/H265/H264 video decoders, up to 60fps 1080P other video decoders (VC-1, MPEG-1/2/4, VP8)
	Wi-Fi Specification	802.11 b/g/n 2412.0MHz - 2462.0MHz
	Operating Temperature	0° C ~ 45° C
	Storage Temperature	-20° C ~ 60° C
	Humidity	10% ~ 80% RH Non-condensing
CERTIFICATION	CE / FCC / RoHS	

DIMENSIONS

Unit: mm [inch]

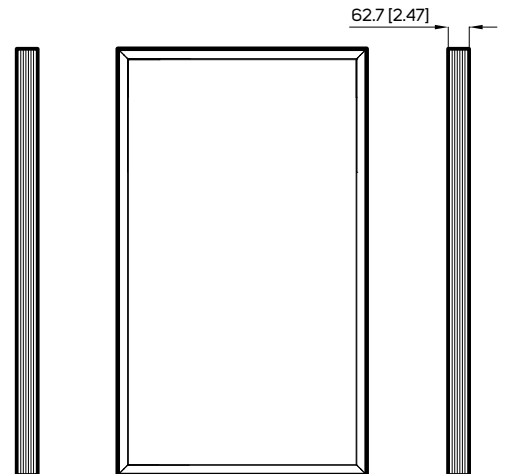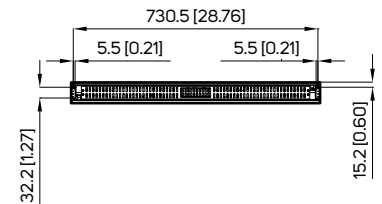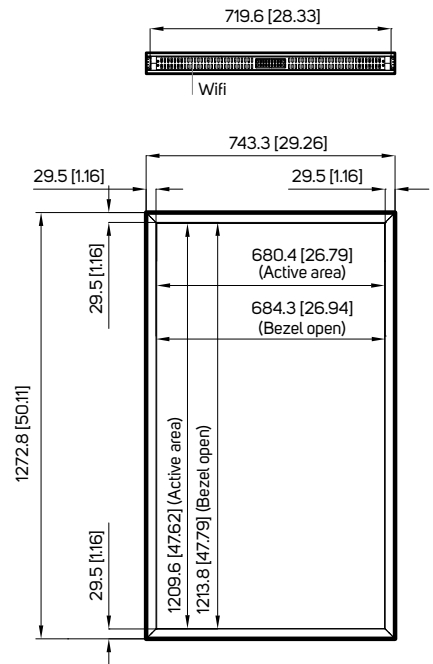

INTERFACE

