# R06L200-IPA1

# 6.5" Front IP65 Display



## **KEY FEATURES**

- 6.5", 640 x 480
- VGA and HDMI input
- Panel mount
- VESA mount
- Front IP65 waterproof and dustproof



## **SPECIFICATIONS**


Display

| • •                    |   |                          |   |
|------------------------|---|--------------------------|---|
| Resolution             | 640x480   | Size                     | 6.5 inches  |
| Contrast Ratio         | 600:1   | Panel Brightness         | 700.0 nits  |
| Display Color          | 16.2M Colors  | View Angles              | 80,80,70,70   |
| Active Area            | 132.48x99.36 mm   | Touch / Glass            | Resistive Touch Screen (Optional)<br>Protection Glass w/o Touch Function (Optional) |
| Environment            |   |                          |   |
| Operating Humidity     | 10% to 90% RH, Non-Condensing   | Operating<br>Temperature | 0°C to 50°C   |
| Storage<br>Temperature | -10°C to 60°C   |                          |   |
| Certification          |   |                          |   |
| Certification          | CE, FCC   |                          |   |
| IO Ports               |   |                          |   |
| USB Port               | 1 x USB for Touch Screen  | Video                    | 1 x VGA<br>1 x HDMI (Optional)<br>1 x DVI (Optional)                                |
| Audio                  | Audio line in (3.5mm) (Optional)<br>2 x Speaker (Optional)  |                          |   |
| Mechanical             |   |                          |   |
| Dimension              | 218 x 164 x 50 mm   | Weight                   | 1.2 kg  |
| Mounting               | VESA Mount/ Panel Mount   | Enclosure                | Metal Housing with Aluminum Bezel   |
| Cooling System         | Fanless Design  | Cut out                  | 191 x 142mm   |
| Accessory              |   |                          |   |
| Accessory              | 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) | Optional Accessory       | Remote Controller (Optional, Varies by product)                                     |
| Power                  |   |                          |   |
| Power Rating           | 12V DC in<br>24V DC in (optional)   |                          |   |
|                        |   |                          |   |

5 Keys: -, +, Power, Esc, Enter

#### **DIMENSIONS**

UNIT:MM

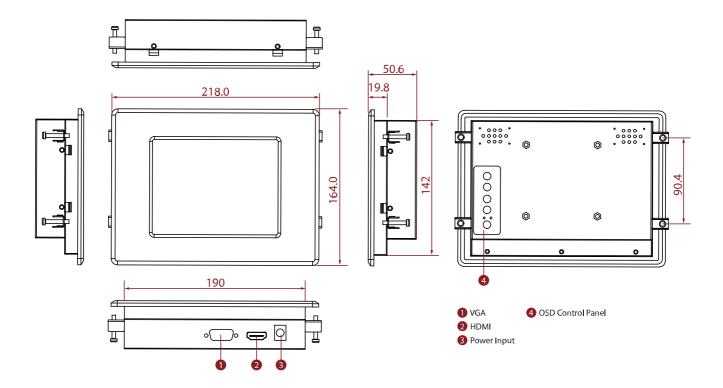

#### **NOTE**

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.