

# R12T600-IPL1

## 12.1" Front IP65 Display



### KEY FEATURES


- 12.1", 800 x 600
- VGA and HDMI input
- Panel mount
- VESA mount
- Front IP65 waterproof and dustproof



### SPECIFICATIONS

| Display                      |  |
|------------------------------|--|
| <b>Resolution</b>            | 800x600  |
| <b>Contrast Ratio</b>        | 700:1  |
| <b>Display Color</b>         | 16.2M Colors   |
| <b>Active Area</b>           | 246x184.5 mm   |
| <b>Size</b>                  | 12.1 inches  |
| <b>Panel Brightness</b>      | 450.0 nits   |
| <b>View Angles</b>           | 80,80,75,65  |
| <b>Touch / Glass</b>         | Resistive Touch Screen<br>Protection Glass w/o Touch Function (Optional)<br>SAW Touch (Surface Acoustic Wave) (Optional) |
| Environment                  |  |
| <b>Operating Humidity</b>    | 10% to 90% RH, Non-Condensing  |
| <b>Storage Temperature</b>   | -10°C to 60°C  |
| <b>Operating Temperature</b> | 0°C to 50°C  |
| Certification                |  |
| <b>Certification</b>         | CE, FCC  |
| IO Ports                     |  |
| <b>USB Port</b>              | 1 x USB for Touch Screen   |
| <b>Audio</b>                 | Audio line in (3.5mm) (Optional)<br>2 x Speaker (Optional)   |
| <b>Video</b>                 | 1 x VGA<br>1 x HDMI (Optional)<br>1 x DVI (Optional)   |
| Accessory                    |  |
| <b>Accessory</b>             | 1 x VGA cable<br>1 x HDMI cable<br>100~240V AC to DC Adapter<br>Power Cord<br>Manual<br>VESA screws(Varies by product)   |
| <b>Optional Accessory</b>    | Remote Controller (Optional,Varies by product)   |
| Power                        |  |
| <b>Power Rating</b>          | 12V DC in<br>24V DC in (optional)  |
| Control                      |  |
| <b>Button</b>                | 5 Keys: -, +, Power, Esc, Enter  |

### DIMENSIONS UNIT:MM

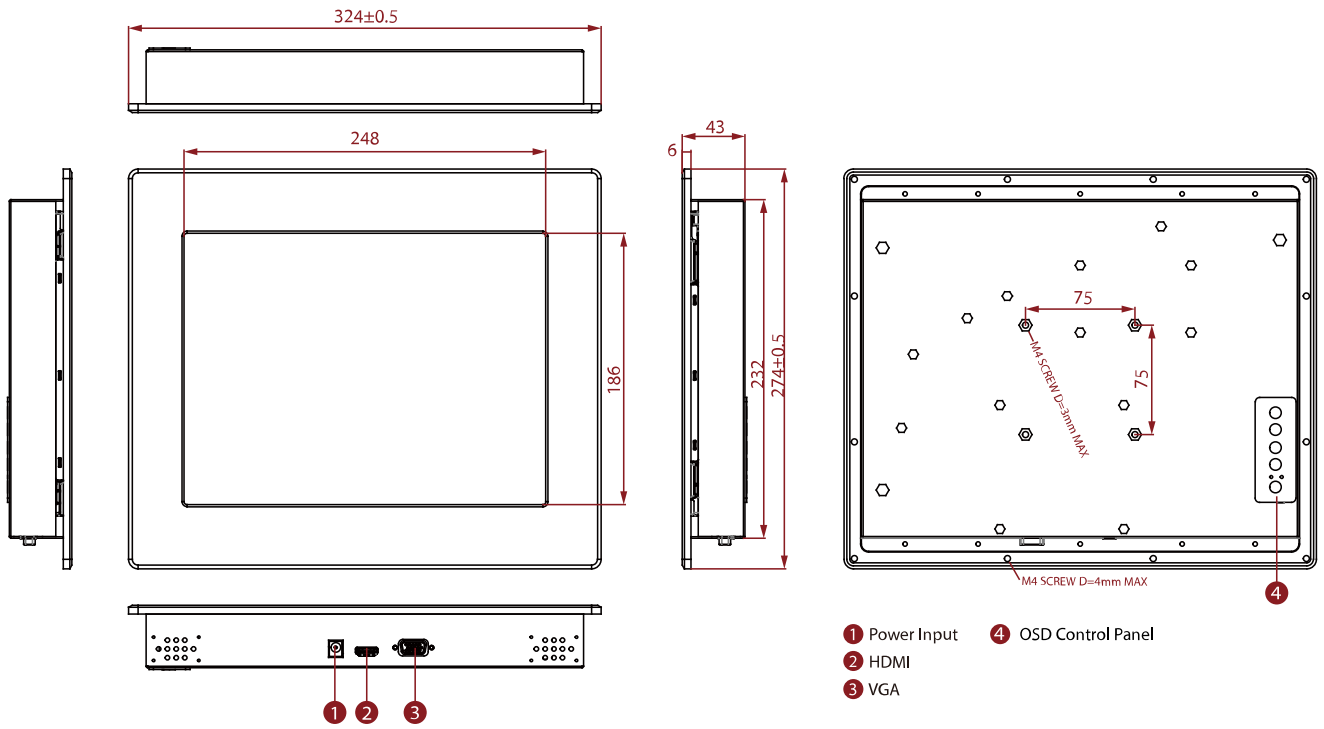

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.