LPC-P170S-LPx

17" Stainless Steel P-cap Panel PC with Intel7th/6th Gen Kaby Lake-U/Skylake-U Core™ i7/i5/i3, 6 sides IP66 Waterproof Feature and Wide Range Power Input

Features

- 7th/6th Gen Kaby Lake-U/Skylake-U Core™ i7/i5/i3
- 17" P-cap Flat Bezel
- DC 9~36V Wide Range Power Input
- 1280*1024 Resolution
- Bottom Side M12 Plastic Connector
- M12 Plastic Waterproof Connectors
- Stainless Steel 304 Food Grade

System

Processor	7th/6th Gen Kaby Lake-U/Skylake-U Core™ i7/i5/i3
System Memory	DDR4 2133MHz SO-DIMM, up to 16 GB
External I/O Port	2 x GIGA LAN External Waterproof cables by 1.5 meters
	(the end side is male RJ45)
	1 x USB 2.0 External Waterproof cables by 1.5 meters
	(the end side is female USB 2.0)
	1 x Power External Waterproof cables by 1.5 meters
	(the end side is 2 wire : ground & +)
	1 x COM (1 x RS-232/422/485) External Waterproof cables by 1.5 meters
	1 x COM (1 x RS-232) External Waterproof cables by 1.5 meters
	(the end side is male COM 9 pin)
	1 x HDMI (w/o Audio)
Storage	2 x SATA3 (6.0Gb/s)
	1 x mSATA (full size mini-PCIe)
Operating System	Windows 7 (32/64bit) (Sky Lake-ULT Only)Windows 8.1 (64bit)
	Windows 10 (64bit)
Expansion	2 x MiniPCIe Slot

LCD

Display Type	17" TFT LCD
Max. Resolution	1280*1024
Max. Color	16.7M
Luminance	350nits
View Angle	80/80/60/80
Backlight Lifetime	30,000 hours

Environment

Operating Temp	-20~60 °C，IEC-60068-2-1/2/14
Storage Temp	-20~60 °C
Humidity	10~90% @40 °C, non-condensing
EMC	FCC / CE Class A Certification
	CE Class B Compliant
Vibration	1.5 Grms @10~500Hz, IEC-60068-2-64

Power Requirement

Power Input	M12 Power Input
	DC 9~36V Wide Range
	Power Input

Mechanical

Construction	Stainless Steel case
IP Rating	IP66 with 6 sides
Mounting	VESA
Dimension	TBC

Touch Screen

Type	17" P-cap USB interface

Dimension & I/O Connector

438

66.90

364

Active View
338.92

271.34

100

100

75

75

8-M4 For VESA MOUNT
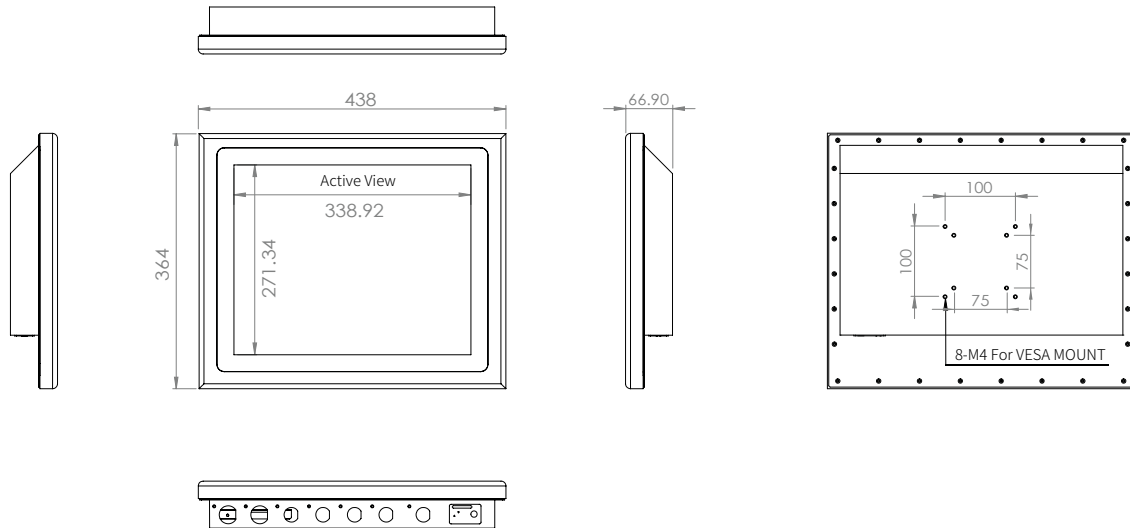
Ordering Information

LPC-P170S-LP5	17" Stainless Steel P-cap Panel PC with Intel Skylake-U i3-6100U, 6 sides IP66, and Waterproof M12 Plastic Connector
LPC-P170S-LP6	17" Stainless Steel P-cap Panel PC with Intel Skylake-U i5-6300U, 6 sides IP66, and Waterproof M12 Plastic Connector
LPC-P170S-LP7	17" Stainless Steel P-cap Panel PC with Intel Skylake-U i7-6600U, 6 sides IP66, and Waterproof M12 Plastic Connector
LPC-P170S-LP8	17" Stainless Steel P-cap Panel PC with Intel Skylake-U i5-7600U, 6 sides IP66, and Waterproof M12 Plastic Connector
WFK-024	WiFi kits w/ cable & Antenna (2.4GHz, 802.11 b/g/n, 1T1R)
WFK-524	WiFi kits w/ cable & Antenna (2.4 & 5GHz, 802.11 a/b/g/n/ac + BT, 2T2R)
04-US-26-00002	120 W / 24V power adapter with 3 pin terminal block (For High Brightness Model)

Ordering Code

LPC-P170S-LPx Series	-H / -OB / -G / -AG / -AR / -B / -V
H = High Brightness 1000 nits LED backlight	
OB = Optical Bonding	
G = Glass withtout touch	
AG = Anti-Glare	
AR = Anti-Reflection	
V = Vandal Proof Glass (By Project)	

ELGENS

ELGENS CO., LTD