


WMP-192

19" Core 2 Duo Fanless Front Full Flat Medical Panel PC

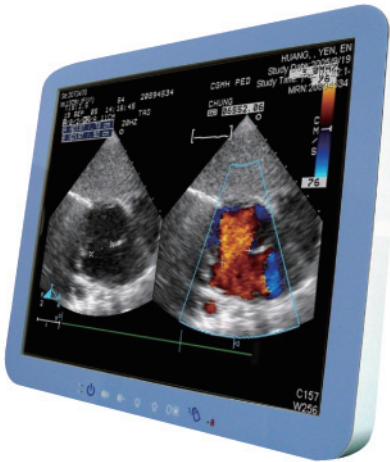

Key Features

- Front full flat resistive touch and fanless design
- Anti-bacteria plastic housing and medical 60601-1 3rd edition certification
- Core 2 Duo 1.06G ULV CPU / Intel GME965 + ICH8M chipset
- 19" 1280x1024 350 nits high brightness LCD
- Full expansion capability with PCI slot, mini PCIe & mini PCI sockets
- Front IP65 protection and HDD anti-vibration design
- Integrated 2 watts x 2 speakers
- Optional WLAN, Bluetooth & anti-bacteria desktop stand

Main System

CPU	• Intel Core 2 Duo U7500 1.06GHz (dual core, 2MB L2 cache, 533MHz FSB) • Support BGA479 socket, 10W TDP (Max.)
Chipset	Intel GME965 + ICH8M
Graphics	GME965 integrated Media Accelerator X3100
Memory	4GB maximum, x 2 DDR2 SODIMM, 533/667/800MHz, 1GB/2GB/4GB
Serial ATA	SATA x 1, 150MB/s transfer rate
USB	USB 2.0, x 6 (x 4 external, x 2 internal)
COM	x 3 (external)
Audio	Realtek ALC268 audio codec, 2+2 watts amplifier
LAN	Realtek RTL8111B Gigabit Ethernet x 2
BIOS	• Award BIOS, 8M EEPROM • RTC wake up / Wake on LAN / Power on after power failure / PnP / ACPI
Speaker	2 watts x 2 (front bottom)

LCD Panel

Size	19" 5:4
Resolution	1280 x 1024 (SXGA)
Brightness	350 nits
Contrast	1000:1
Color numbers	16.7M colors (RGB 6bit + HiFRC)
Viewing angle	170 (H) / 160 (V)
Response time	5 ms (R + F)
Backlight	LED, 50,000 hours life time

Touch Panel

Type	Front full flat customized touch panel
Technology	Resistive touch, 5-wire
Light transmittance	84 ± 3%
Hardness	≥ 3H
Touch stylus	No limitation
Resolution	2048 x 2048
Life time	35 million activations

Storage & Expansion

HDD	2.5" SATA HDD drive bay x 1 + anti-vibration kit, 160GB / 500GB
Expansion slot	• PCI slot x 1 • Card size: 100 x 220 x 12/2 mm • Mini PCIe x 1 (52 pin card-edge type) . Mini PCI x 1

I/O & Control Keys

USB	USB 2.0 x 4
COM	DB-9 x 3 (RS232 x 2, RS232/422/485)
LAN	RJ-45 x 2, Gigabit
PS2	X 2, PS2 keyboard & PS2 mouse
Video-out	DVI-D x 1, VGA DB-15 x 1
Audio	Line-in, Line-out, Microphone-in (3.5 mm phone-jack)
Power input	DC-in x 1, 12V~28V
Control keys	• Front side, resistive touch type • Power on/off, Brightness, Audio volume, Backlight on/off, Touch on/off

Power

Power adaptor	External, 100 watts, 90~264V AC in, 12V DC out, medical grade, 1.2m DC cable
Power consumption	60 watts (typical, without any add-ons)


Mechanical & Environmental

Housing	• Front: Full flat design / Touch (standard) • Rear: Plastic + I/O cover w/ antibacterial treatment
IP rating	IP65 – front side (vertical direction usage)
Cooling	Fanless design
Mounting	VESA 75 x 75 / 100 x 100 mm
Kensington lock	Yes, x 1 at bottom
Dimension	440.5 x 369.8 x 83 mm (W x H x D, w/o stand)
Weight (net)	7.5 Kg (approximate, w/o power adaptor)
Temperature	• Operating – 0°C~40°C . Storage – -20°C~60°C
Humidity	Operating & storage – 10%~90%, non-condensing
Regulatory	• FCC-B, cUL, CE, VCCI • Medical 60601-1 3 rd edition (EN 60601-1:2006, ANSI/AAMI ES60601-1:2005, CAN/CSA C22.2 No. 60601-1:08)

WMP-192


19" Core 2 Duo Fanless Front Full Flat Medical Panel PC

Outline Dimension

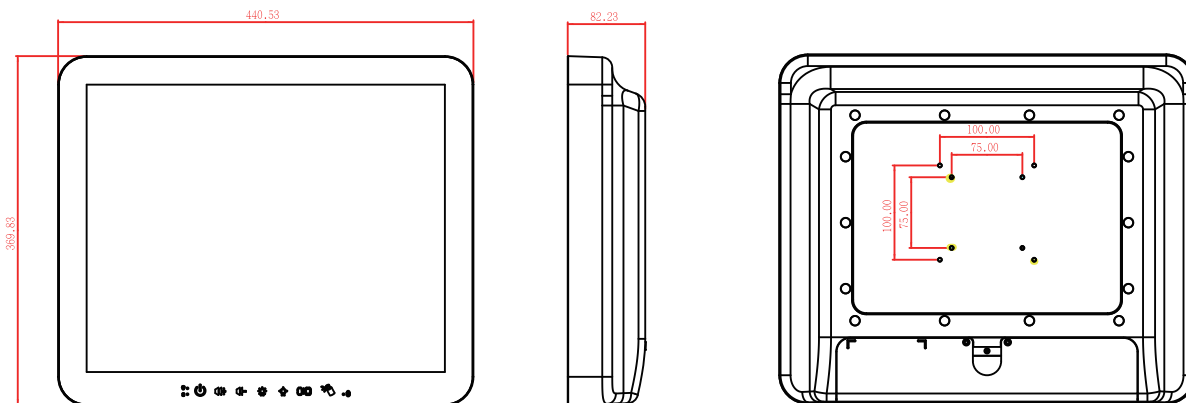


Packaging / Options / Customization

- Packaging** System, power adaptor, AC power cord, CD (drivers & manual)
- Options**
- WLAN – 802.11 a/b/g/n mini PCIe module w/ internal antenna x 2
 - Bluetooth 2.1 (USB)
 - Power adaptor w/ 2.4m or 3.6m DC cable
 - Anti-bacteria desktop stand (metal, white)
- Customization** Microphone on I/O cover (Configure of order service)

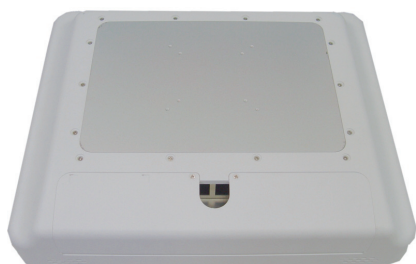

I/O Connectors

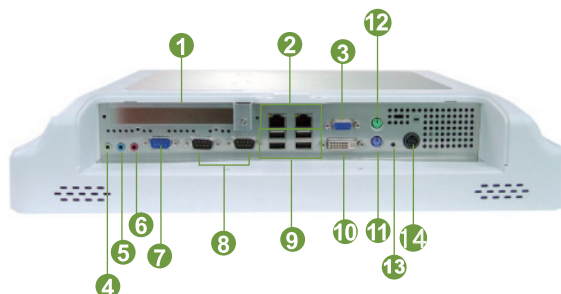

- | | |
|-----------------|-----------------|
| 1 PCI expansion | 8 RS232 x 2 |
| 2 Giga LAN x 2 | 9 USB x 4 |
| 3 VGA | 10 DVI-D |
| 4 Line-out | 11 PS2 keyboard |
| 5 Line-in | 12 PS2 mouse |
| 6 Microphone-in | 13 Reset |
| 7 RS232/422/485 | 14 DC-in |

Ordering Information

- WMP-192-UR0B0; U7500 1.06G, DDR2 1G, SATA 160G



Web: www.wincomm.com.tw

Contact: sales_support@wincomm.com.tw

Wincomm Corporation

3F, NO. 14, Prosperity Road II, Science-Based Industrial Park,
Hsinchu, Taiwan 30078, R.O.C

Tel: +886 3 578 0000 Fax: +886 3 578 0295